
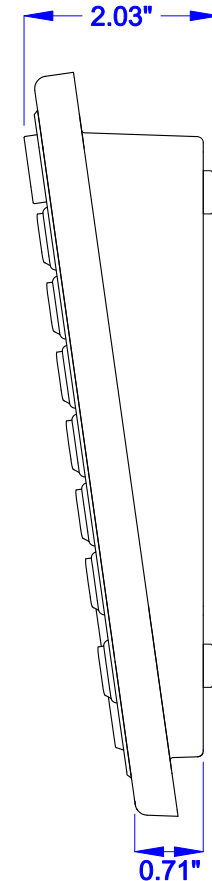


BT-87-TP

| DATE | CHANGES | INTL | REV |
|----------|------------------------|------|------|
| 07.22.08 | Original | JB | 1.00 |
| 10.15.08 | Nomenclature Update | JB | 1.00 |
| 12.17.08 | LED Indicators Removed | JB | 1.00 |

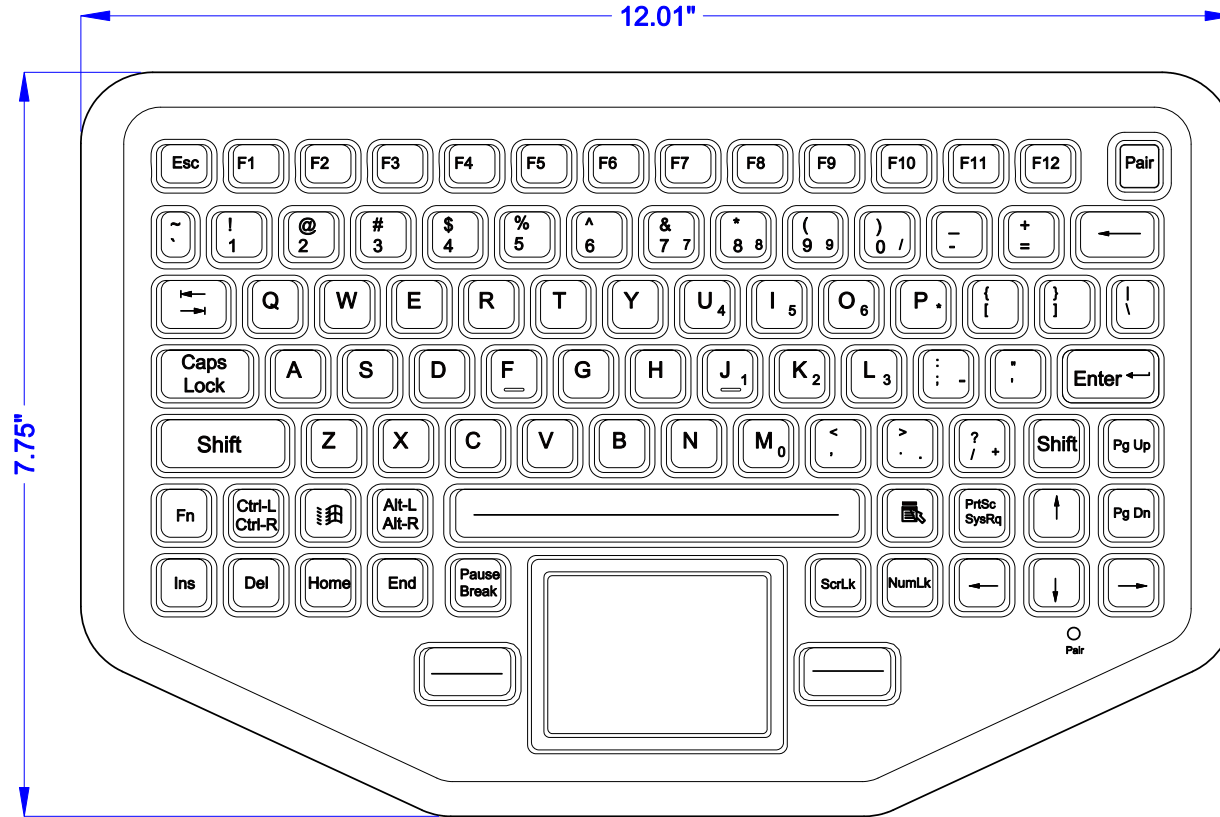

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
OPERATING: 32°F to +140°F (0°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

POWER

BLUETOOTH: 2 AA Batteries

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis


WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

BT-87-TP BACK/MOUNTING

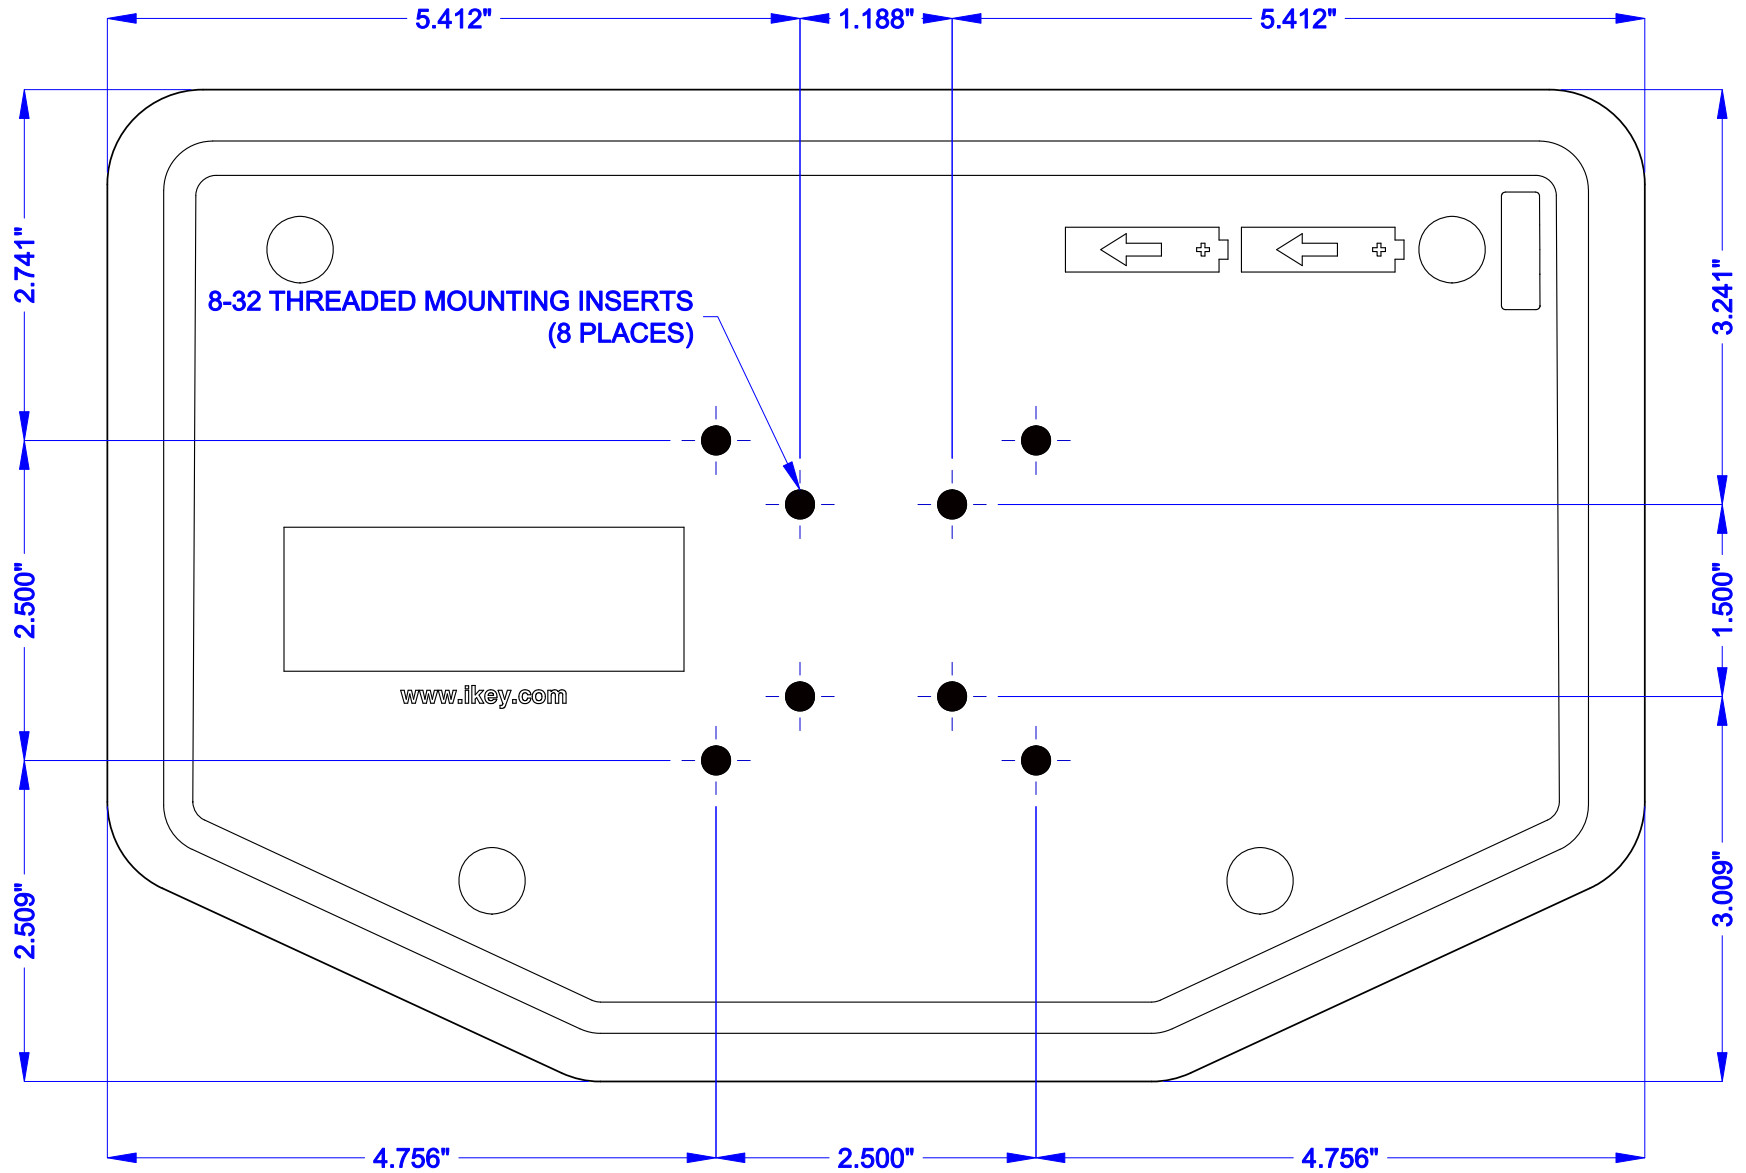

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:1.5

iKey iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2008 iKey, Ltd.
 Voice: (512) 897-0283
 Fax: (512) 927-8830

Part Number: BT-87-TP
 Drawing Title: BT-87-TP-MKT

Drawing Number: MKT0128
 Revision: 1.00

Sheet: 2 OF 2
 Date: 12.17.08
 JWB