


PM-5K-FSR

DATE	CHANGES	INTL	REV
02.27.15	Original	SCC	1.0

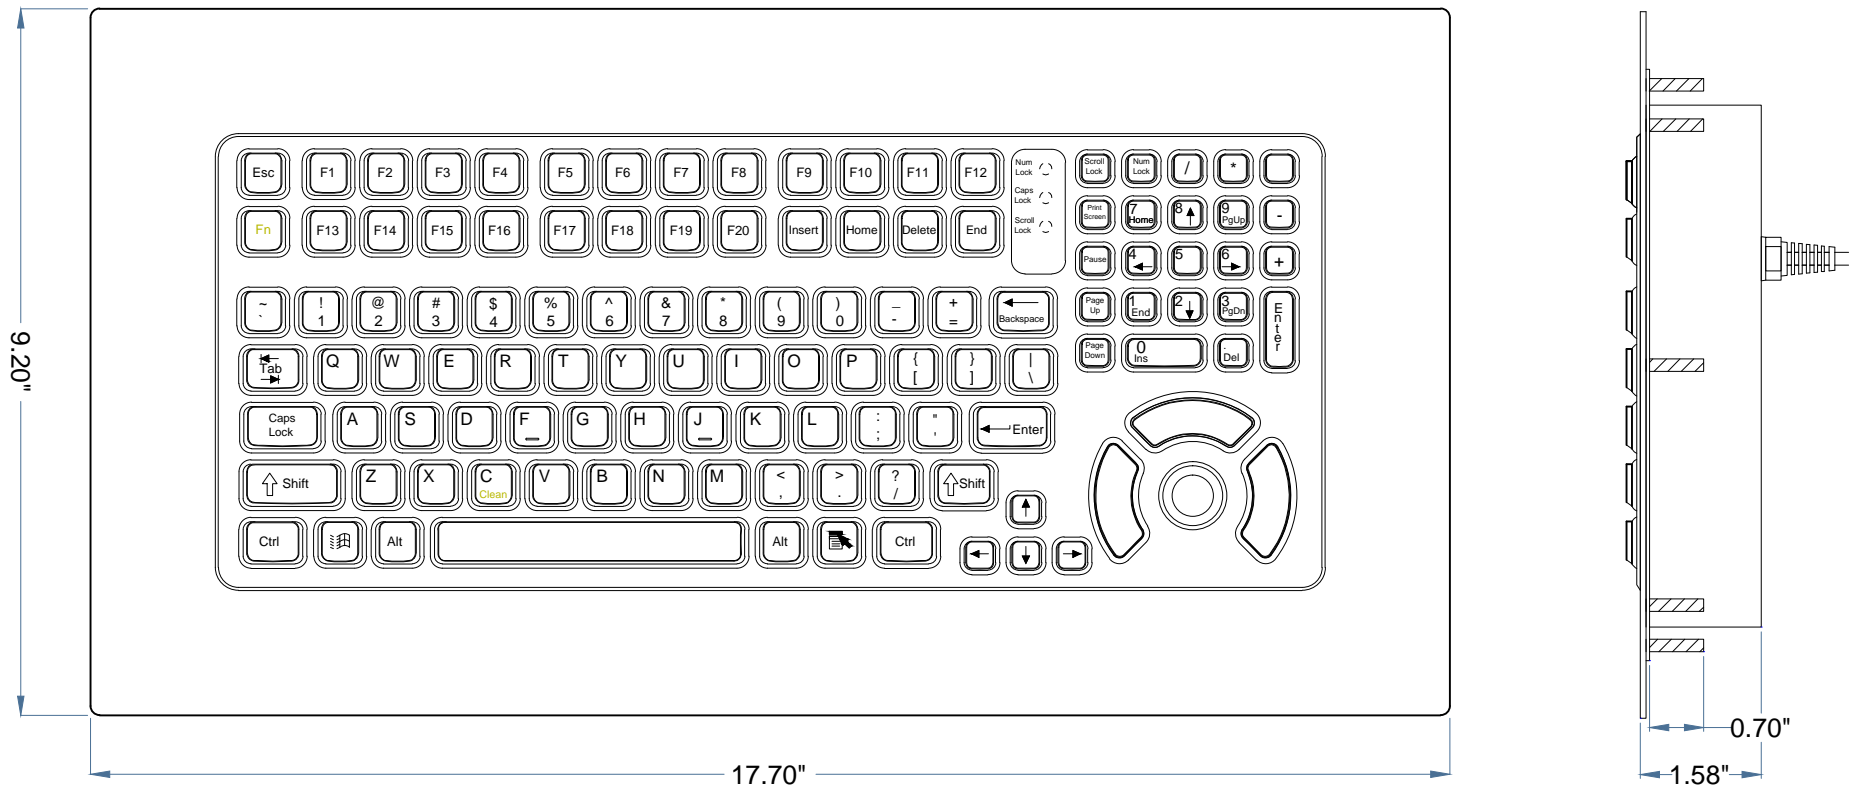

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
 OPERATING: -4°F to +140°F (-20°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 35mA@5V (from Keyboard port)
 POINTER: 5mA@5V (from Mouse port)
*PS2 current ratings valid only when both keyboard and mouse are connected
 USB: 40mA@5V (from USB port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

5.25 lbs +/- 0.10 lbs (2.38 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL



iKey, Ltd.
 2621 Ridgepoint Dr. Suite 235
 Austin, Texas 78754

©2015 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: PM-5K-FSR

Drawing Title: PM-5K-FSR-MKT

Drawing Number: MKT0371



Revision: 1.0

Sheet: 1 OF 2

Date: 02.27.15

SCC

PM-5K-FSR BACK / MOUNTING

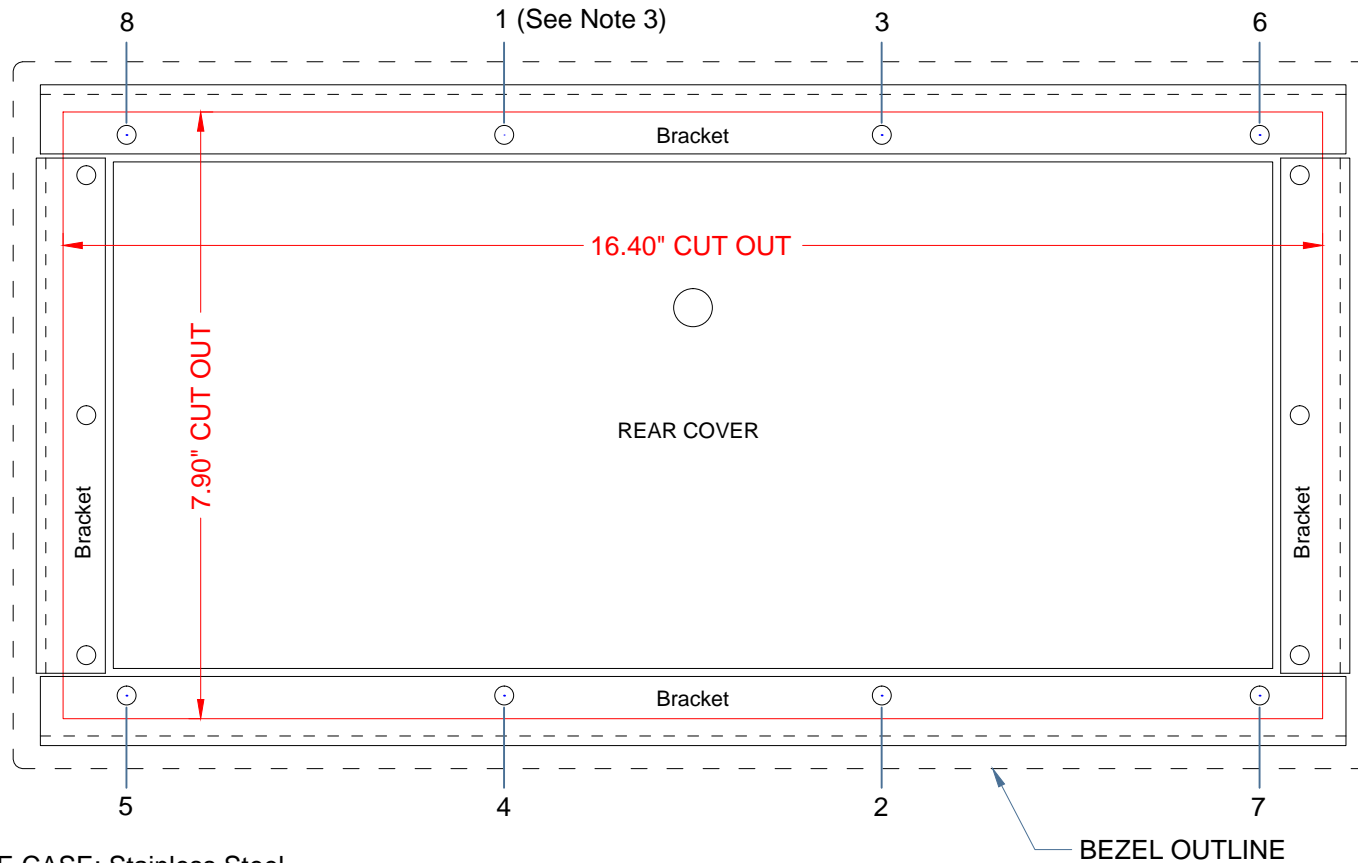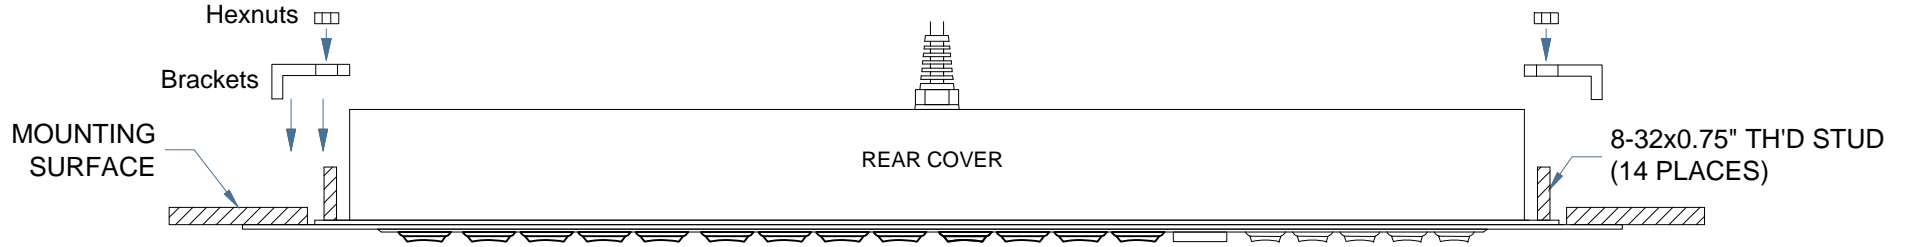

ENCLOSURE CASE: Stainless Steel

1. PLACE UNIT IN 7.9\"X16.4\" CUT PIT
2. PLACE 4 BRACKETS ON EACH SIDE AND HAND TIGHTEN LOCKING HEXNUTS OVER ALL 14 8-32x0.75\" STUDS
3. TIGHTEN WITH TORQUE WRENCH (15 IN.LB.) IN ORDER SHOWN (1-14) ABOVE

PROPRIETARY AND CONFIDENTIAL



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2015 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: PM-5K-FSR
Drawing Title: PM-5K-FSR-MKT

Drawing Number: MKT0371
Revision: 1.0

Sheet: 2 OF 2
Date: 02.27.15
SCC