


DBL-810-TB

DATE	CHANGES	INTL	REV
07.02.08	Original	JB	1.0
02.03.10	Added dimensions for feet and added Page 2	JB	2.0

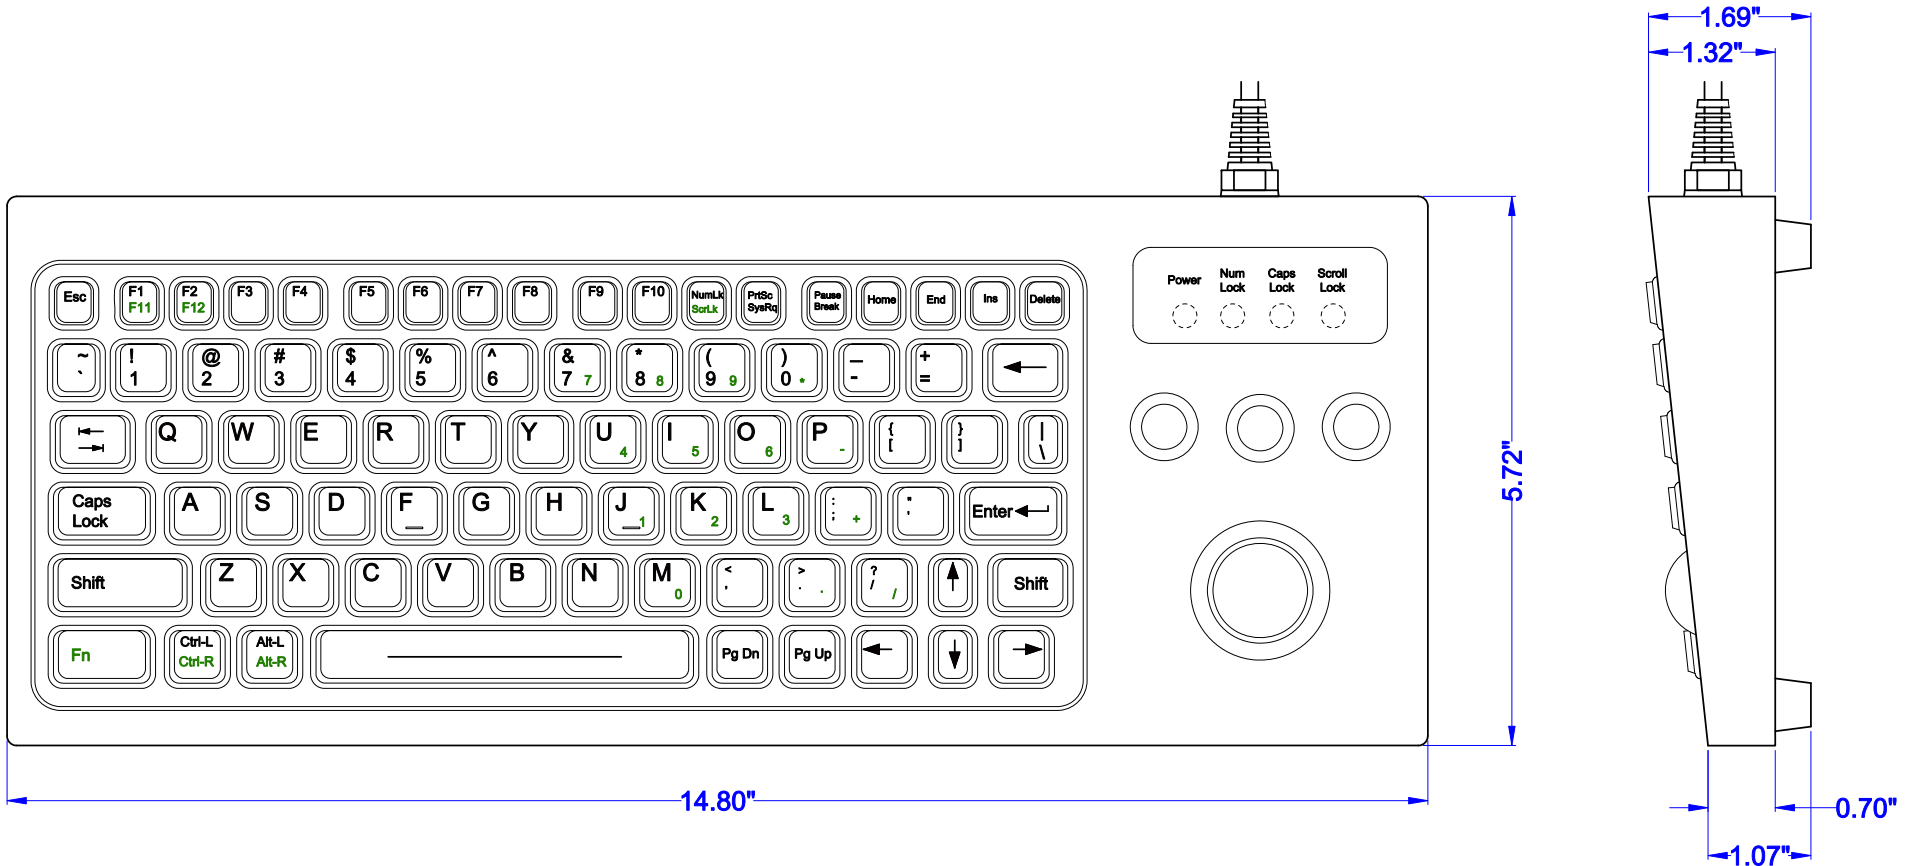

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
KEYBOARD: 200mA@5V (from Keyboard port)
TRACK BALL: 20mA@5V (from Mouse port)
USB: 220mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +185°F (-40°C to +85°C)
OPERATING: +32°F to +149°F (0°C to +65°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
FREQUENCY RANGE: 20Hz-2KHz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

4.00 lbs +/- 0.10 lbs (1.81 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2010 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8630

Part Number: DBL-810-TB

Drawing Title: DBL-810-TB-MKT

Drawing Number: MKT0103


Revision: 2.0

Sheet: 1 OF 2

Date: 02.03.10

JWB

DBL-810-TB BACK

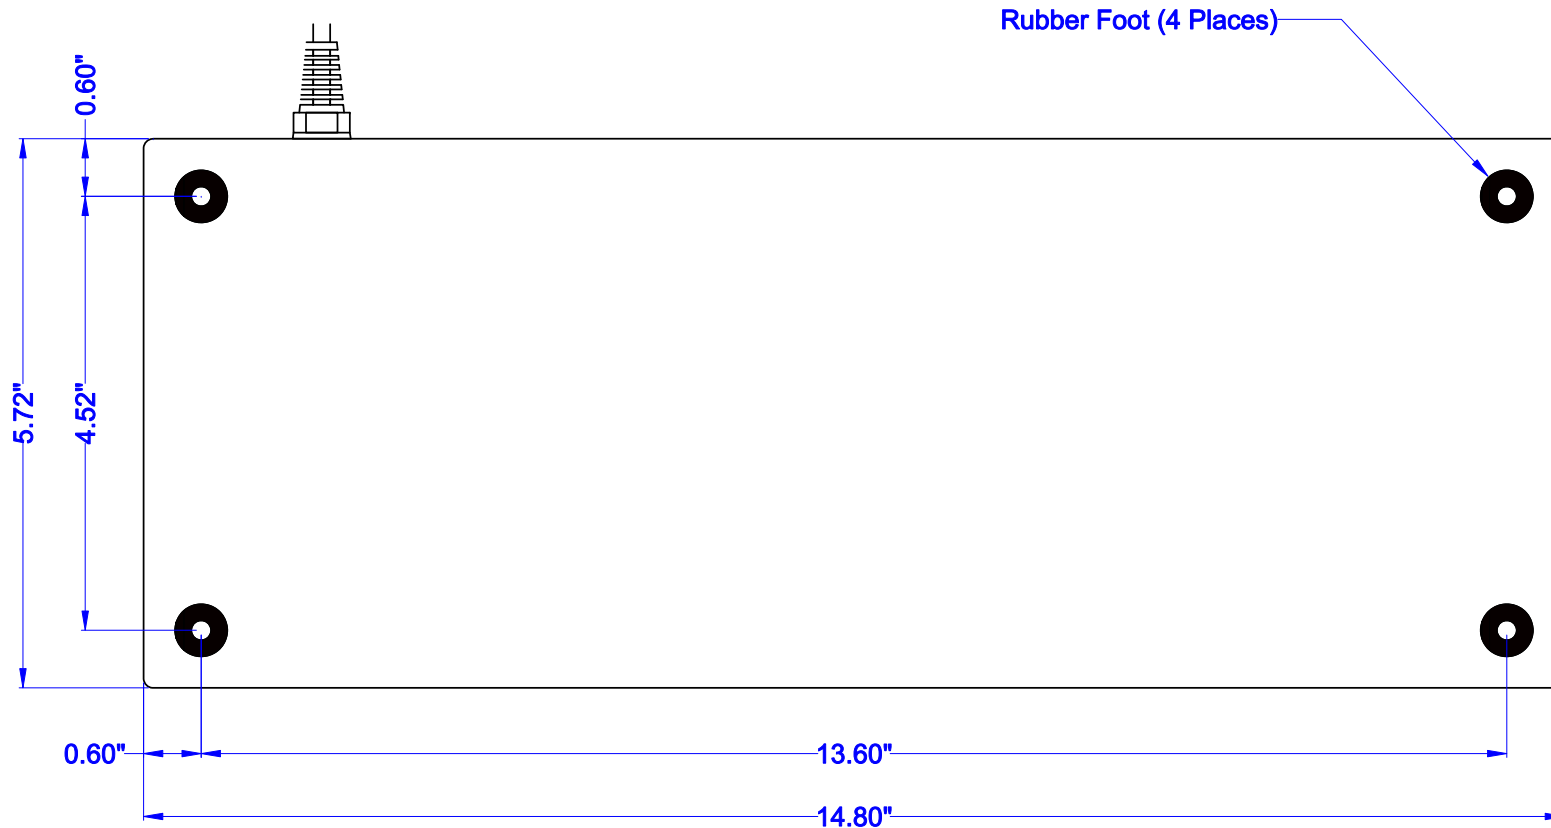

ENCLOSURE CASE: Stainless Steel

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2010 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8530

Part Number: DBL-810-TB

Drawing Number: MKT0103

Sheet: 2 OF 2

Drawing Title: DBL-810-TB-MKT

Revision: 2.0

Date: 02.03.10

JWB