


DT-1000-IS

DATE	CHANGES	INTL	REV
12.08.11	Original	TH	1.0

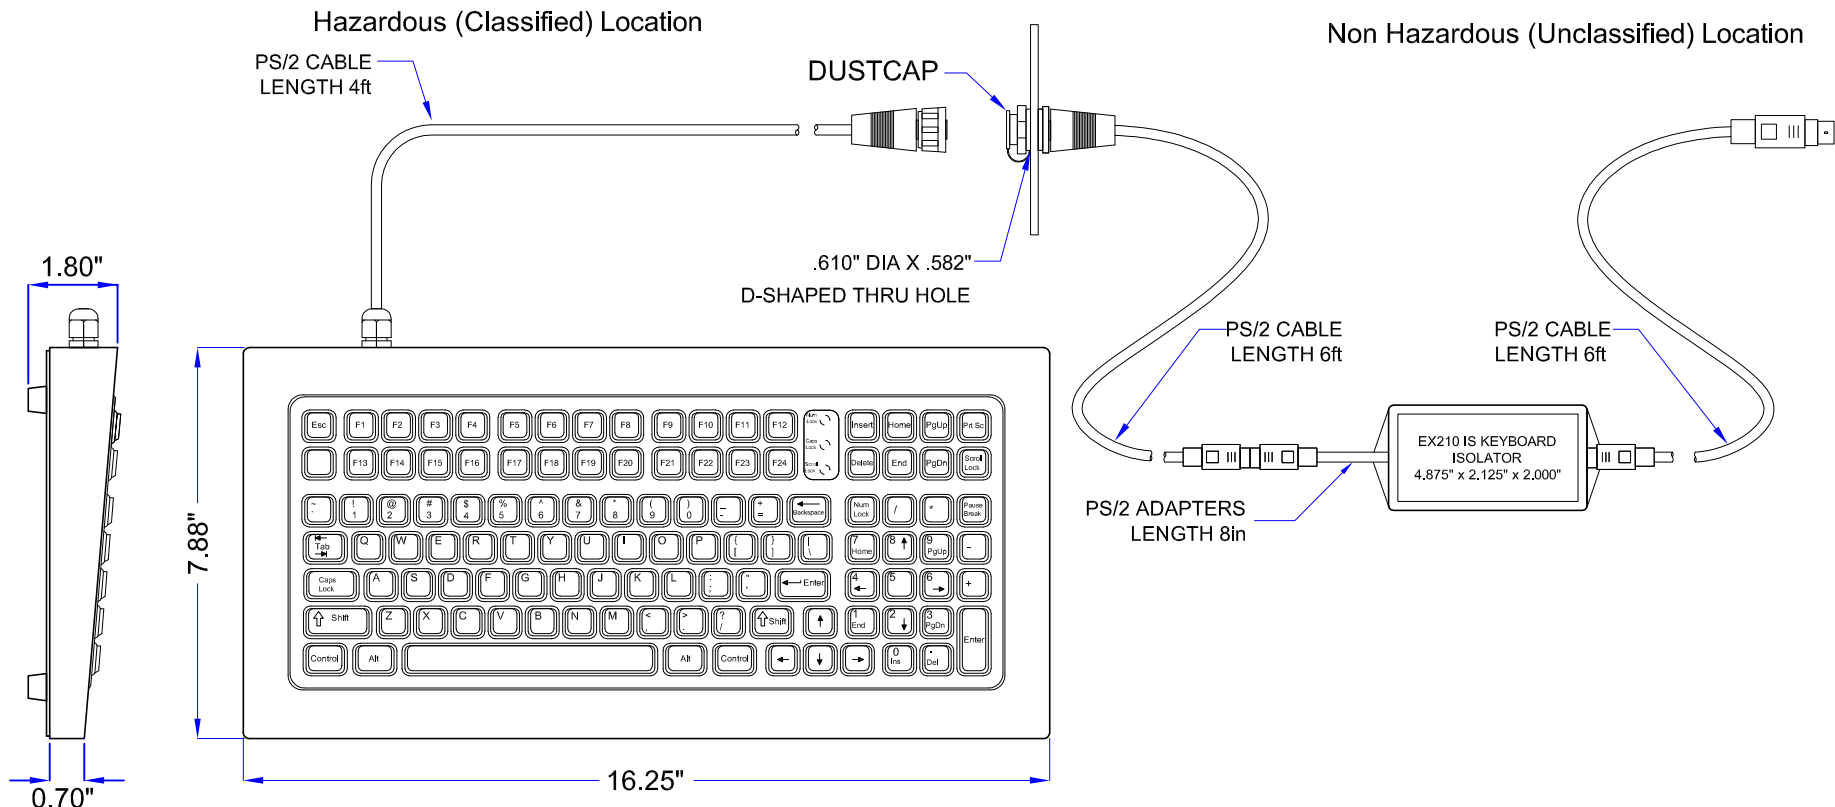

KEYBOARD SPECIFICATIONS:

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

See Drawing Number IS-94001 for Power Requirements
 Installation shall be in accordance with NEC, Article 504,
 ANSI, NFPA 70

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

5.25 lbs +/- 0.10 lbs (2.38 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

NOT TO SCALE