


# SB-97-TP

| DATE     | CHANGES  | INTL | REV |
|----------|----------|------|-----|
| 12.01.11 | Original | TWH  | 1.0 |
|          |          |      |     |

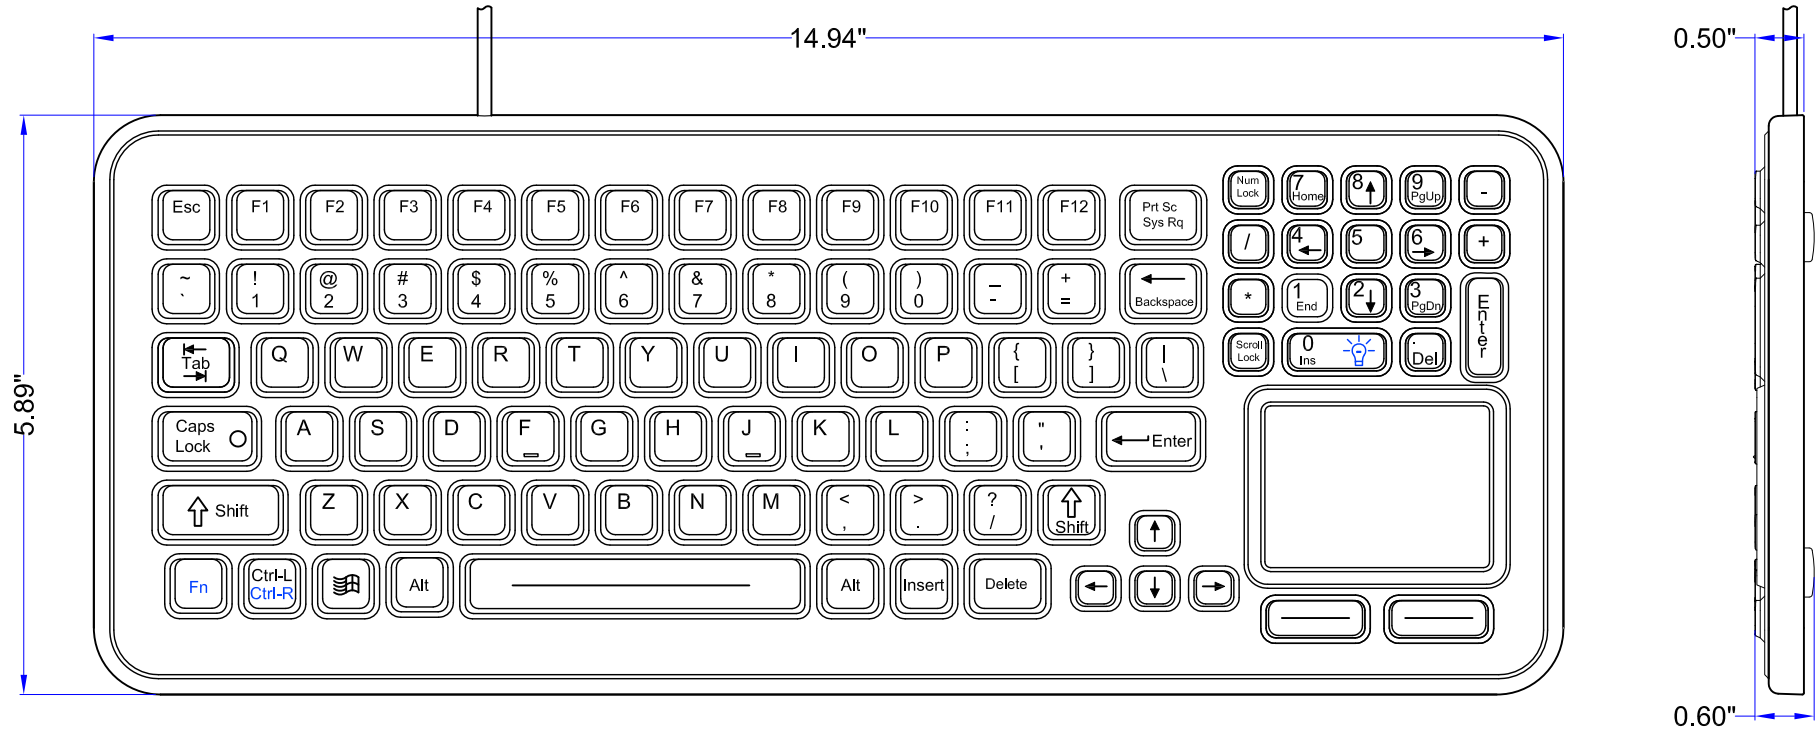

### KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

### TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

### VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

### POWER

USB: 200mA@5V (from CPU port)

### HUMIDITY

100% Humidity Resistant

### SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

### WEIGHT

1.2 ± 0.10 lbs (0.54 ± 0.05 kg)

PROPRIETARY AND CONFIDENTIAL