


# SK-97-TP

DATE	CHANGES	INTL	REV
07.01.08	Original	JB	1.00
01.05.11	Updated Temp Spec	JMW	1.1
01.24.11	Changed lineweights	TWH	1.2

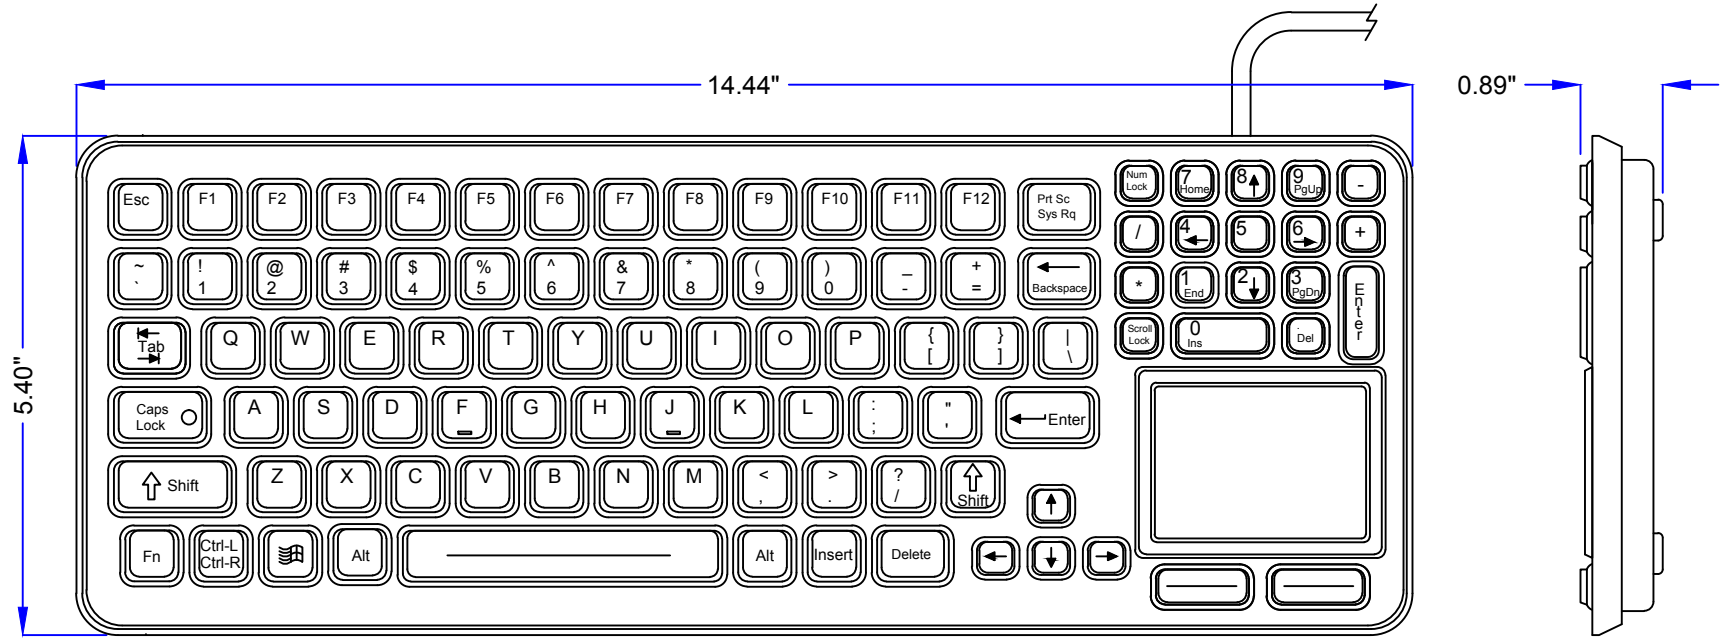

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)  
 OPERATING: -40°F to +158°F (-40°C to +70°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2: KEYBOARD: 50mA@5V (from Keyboard port)  
 TOUCH PAD: 10mA@5V (from Mouse port)  
 USB: 60mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axes

## WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754

©2011 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: SK-97-TP  
 Drawing Title: SK-97-TP-MKT

Drawing Number: MKT0081  
 Revision: 1.2

Sheet: 1 OF 1  
 Date: 01.24.11  
 TWH