


# DU-5K-FSR

DATE	CHANGES	INTL	REV
02.27.15	Original	SCC	1.0

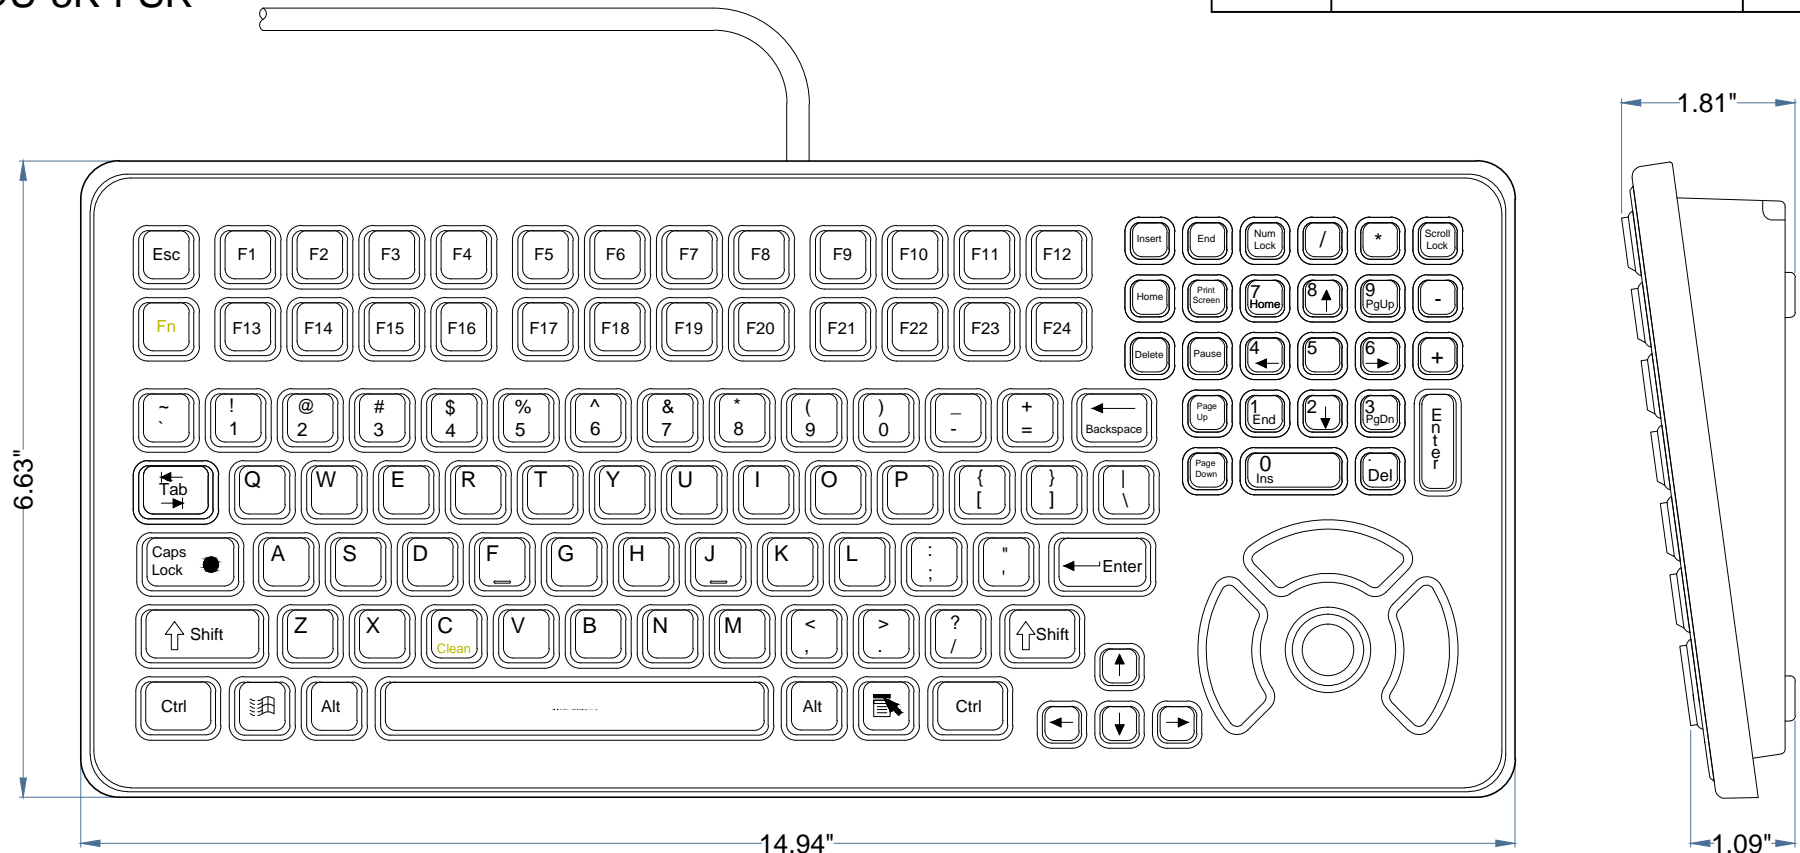

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## POWER (Maximum)

PS2:  
 KEYBOARD: 35mA@5V (from Keyboard port)  
 POINTER: 5mA@5V (from Mouse port)  
\*PS2 current ratings valid only when both keyboard and mouse are connected  
 USB: 40mA@5V (from USB port)

## TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

## HUMIDITY

100% Humidity Resistant

## VIBRATION

POWER SPECTRAL DENSITY: .04g<sup>2</sup>/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

## WEIGHT

2.25 lbs +/- 0.10 lbs (1.02 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL



iKey, Ltd.  
 2621 Ridgepoint Dr. Suite 235  
 Austin, Texas 78754

©2015 iKey, Ltd.  
 Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: DU-5K-FSR

Drawing Title: DU-5K-FSR-MKT

Drawing Number: MKT0336


Revision: 1.0

Sheet: 1 OF 2

Date: 02.27.15


SCC

# DU-5K-FSR BACK / MOUNTING

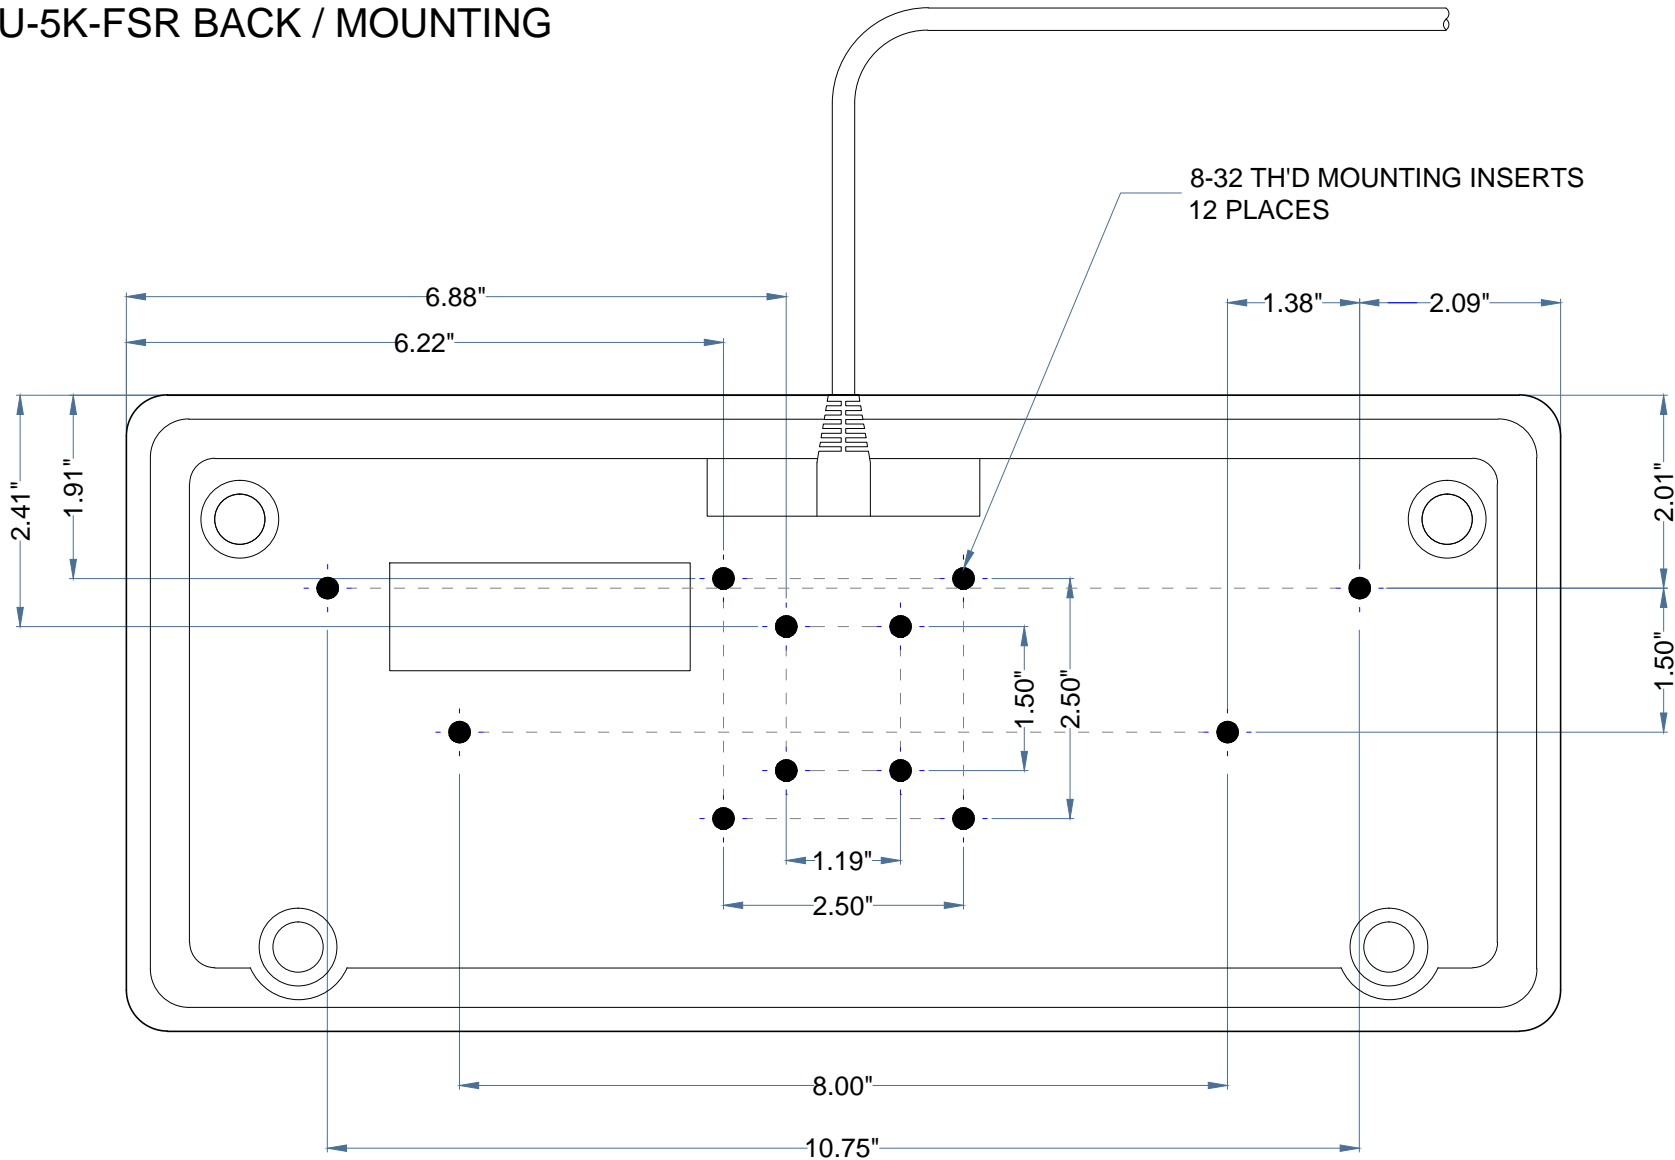

ENCLOSURE CASE: ABS/Polycarbonate

PROPRIETARY AND CONFIDENTIAL

 <b>iKey, Ltd.</b> 2621 Ridgepoint Dr. Suite 235 Austin, Texas 78754 Voice: (512) 937-0283 Fax: (512) 927-8530	©2015 iKey, Ltd.	Part Number: DU-5K-FSR	Drawing Number: MKT0336	Sheet: 2 OF 2	
		Drawing Title: DU-5K-FSR-MKT	Revision: 1.0	Date: 02.27.15	SCC