


# EKS-97-TP

DATE	CHANGES	INTL	REV
10.05.11	Original	TH	1.0

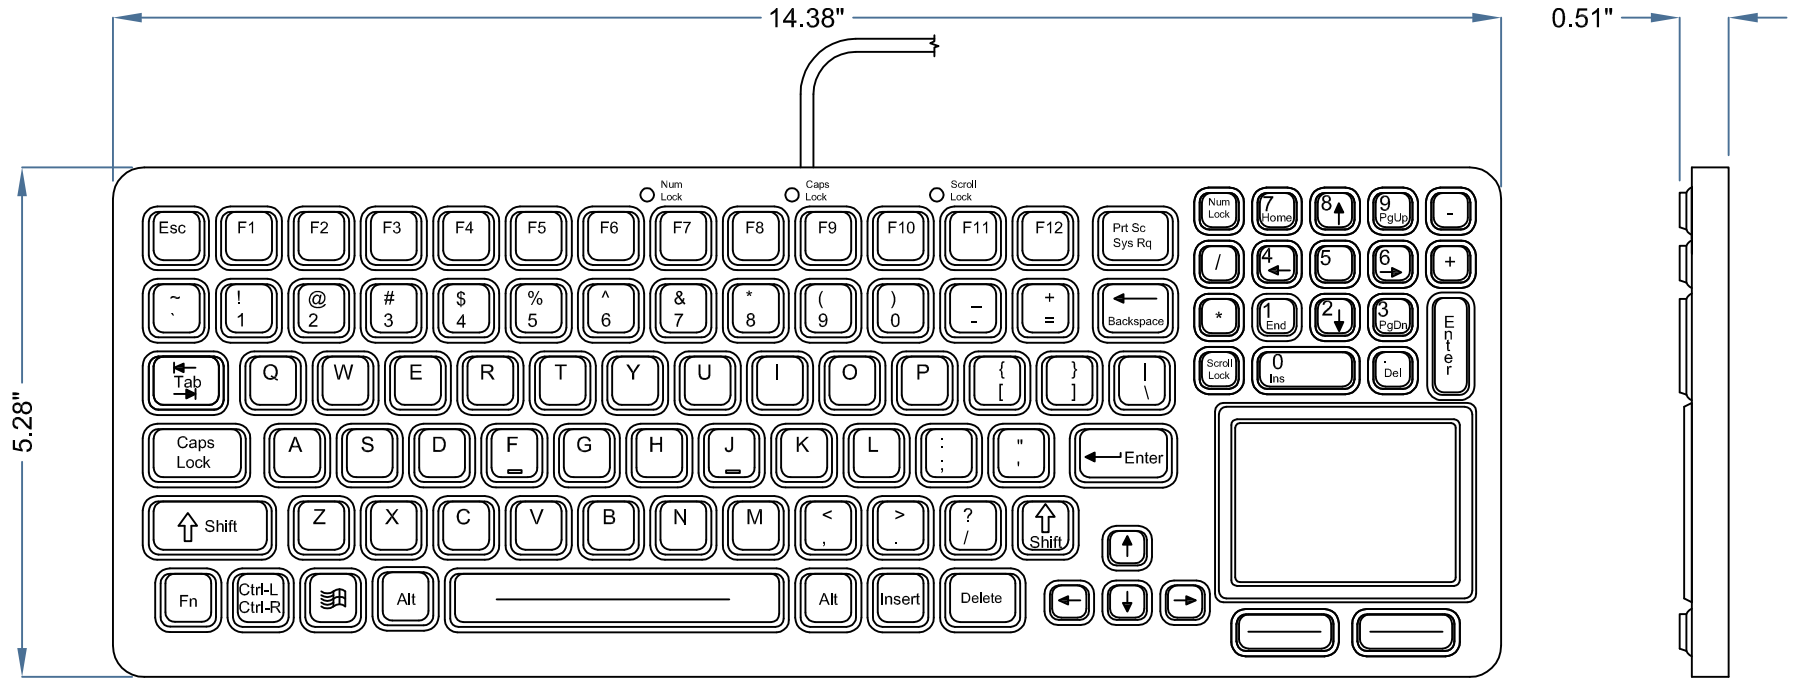

## KEY SWITCH

**MATERIAL:** Industrial Silicone Rubber  
**LIFE:** Greater Than 10 Million Cycles  
**TRAVEL:** 0.055 in.  
**ACTUATION FORCE:** 7.05 oz. +/- 1.06oz (200g +/- 30g)  
**FEEDBACK:** Tactile with Mechanical Snap

## TEMPERATURE RANGE

**STORAGE:** -40°F to +194°F (-40°C to +90°C)  
**OPERATING:** -40°F to +158°F (-40°C to +70°C)

## VIBRATION

**POWER SPECTRAL DENSITY:** .04g/HZ  
**FREQUENCY RANGE:** 20Hz-2Khz  
**DURATION OF TEST PER AXIS:** 3 hours

## POWER

USB: 60mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axes

## WEIGHT

1.20 lbs +/- 0.10 lbs (0.54 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



**iKey, Ltd.**  
 2621 Ridgpoint Dr. Suite 235  
 Austin, Texas 78754

©2011 iKey, Ltd.

Voice: (512) 837-0283  
 Fax: (512) 927-8530

Part Number: EKS-97-TP

Drawing Title: EKS-97-TP-MKT

Drawing Number: MKT0280

Revision: 1.0

Sheet: 1 OF 1

Date: 10.05.11

TWH