


PM-102-TP

| DATE | CHANGES | INTL | REV |
|----------|----------|------|------|
| 05.19.09 | Original | JB | 1.00 |
| | | | |

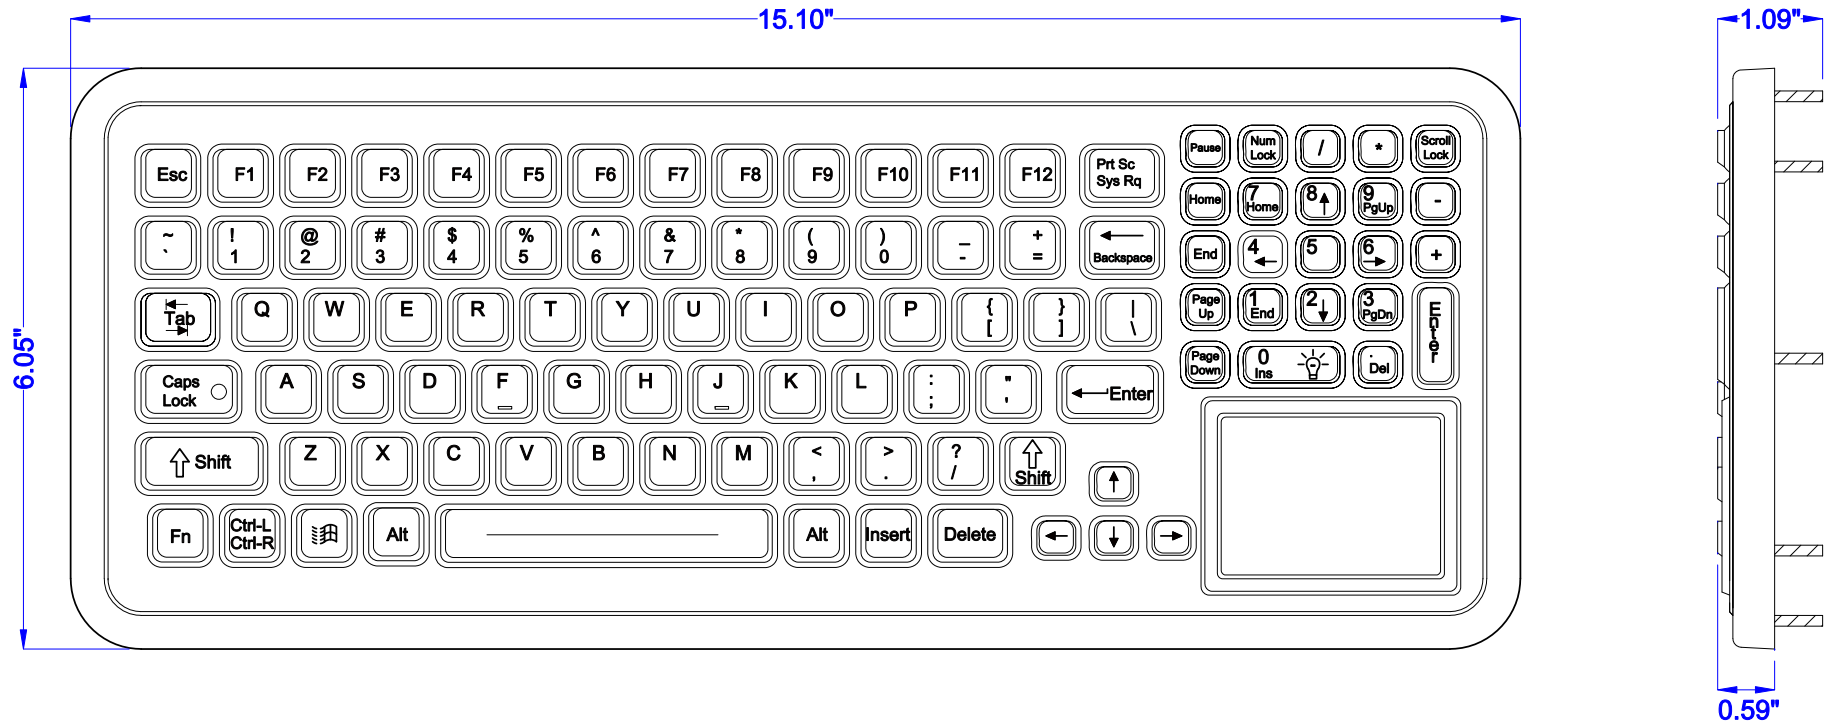

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

POWER

PS2:
KEYBOARD: 50mA@5V (from Keyboard port)
POINTER: 10mA@5V (from Mouse port)
USB: 60mA@5V (from CPU port)

TEMPERATURE RANGE

STORAGE: -40°F to +149°F (-40°C to +65°C)
OPERATING: +32°F to +140°F (0°C to +60°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
FREQUENCY RANGE: 20Hz-2Khz
DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2008 iKey, Ltd.
 Voice: (512) 937-0283
 Fax: (512) 927-8530

Part Number: PM-102-TP

Drawing Title: PM-102-TP-MKT

Drawing Number: MKT0194


Revision: 1.00

Sheet: 1 OF 2

Date: 05.19.09

JWB

PM-102-TP MOUNTING

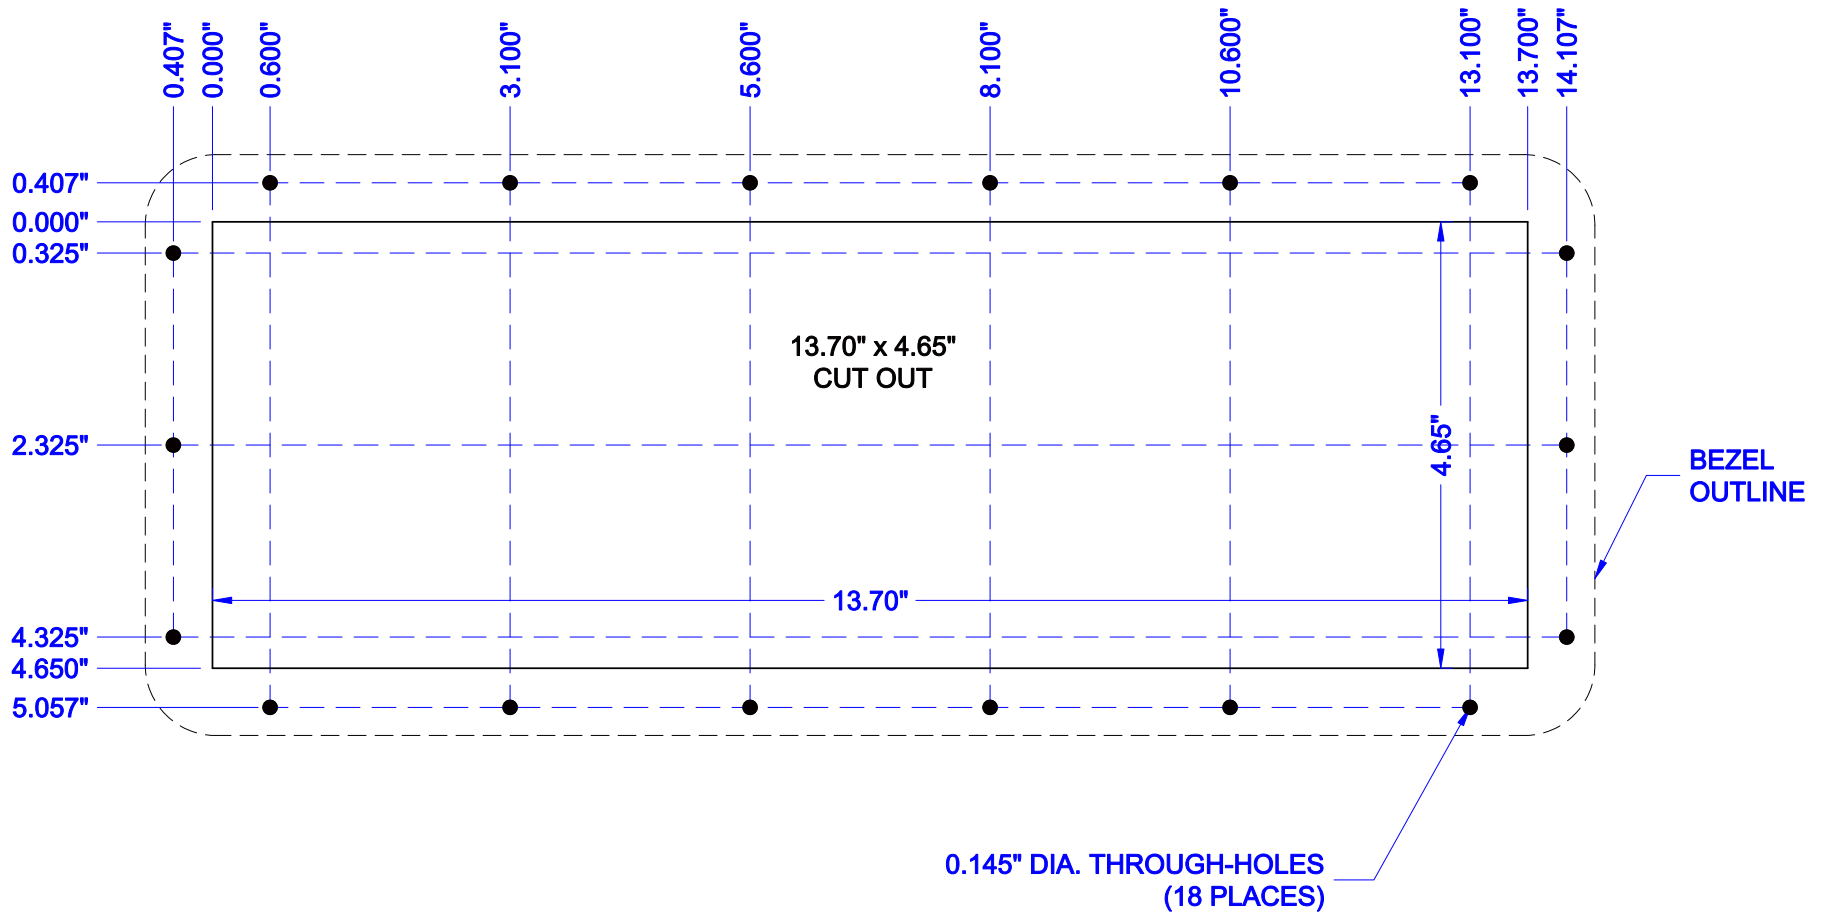

PM BEZEL: ABS/Polycarbonate with #4-40 x 0.50" Metal Studs (18 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8630

Part Number: PM-102-TP

Drawing Title: PM-102-TP-MKT

Drawing Number: MKT0194

Revision: 1.00

Sheet: 2 OF 2

Date: 05.19.09 JWB