


# PM-2000-FSR

DATE	CHANGES	INTL	REV
07.22.04	Original		1.00
01.02.09	Updated Format	JB	1.00

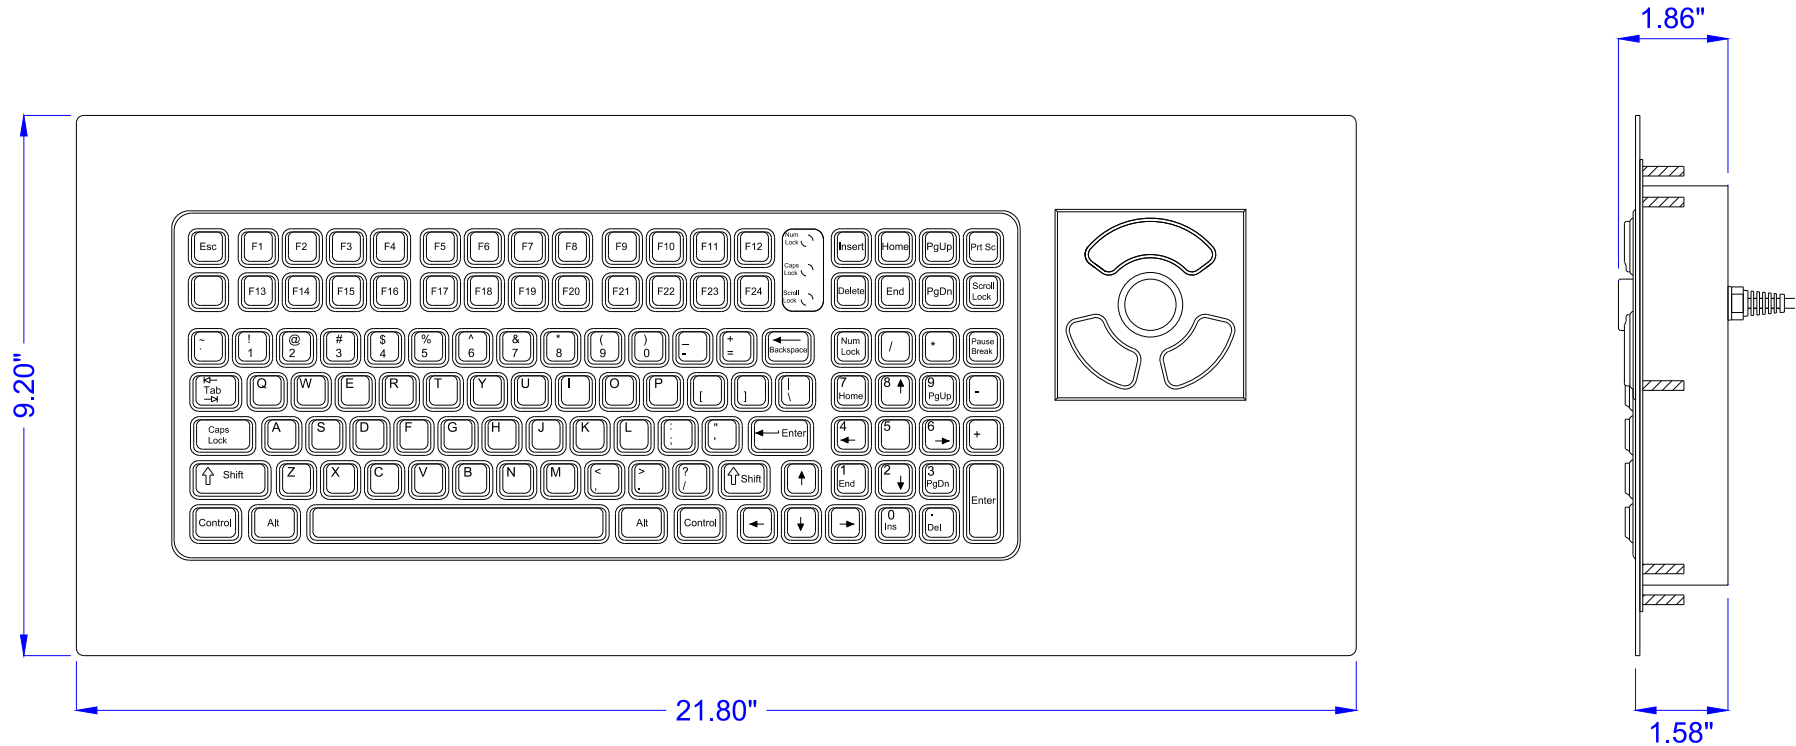

## KEY SWITCH

MATERIAL: Industrial Silicone Rubber  
 LIFE: Greater Than 10 Million Cycles  
 TRAVEL: 0.055 in.  
 ACTUATION FORCE: 7.03 oz. +/- 1.06oz (200g +/- 30g)  
 FEEDBACK: Tactile with Mechanical Snap

## TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)  
 OPERATING: -4°F to +140°F (-20°C to +60°C)

## VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ  
 FREQUENCY RANGE: 20Hz-2Khz  
 DURATION OF TEST PER AXIS: 3 hours

## POWER

PS2 or AT/Serial:  
 KEYBOARD: 50mA@5V (from Keyboard port)  
 POINTER: 35mA@5V (from Mouse port)  
 USB: 85mA@5V (from CPU port)

## HUMIDITY

100% Humidity Resistant

## SHOCK

3 X 11 ms pulses of 50g on each of 3 axis


## WEIGHT

5.50 lbs +/- 0.10 lbs (2.49 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:3.5

# BACK VIEW

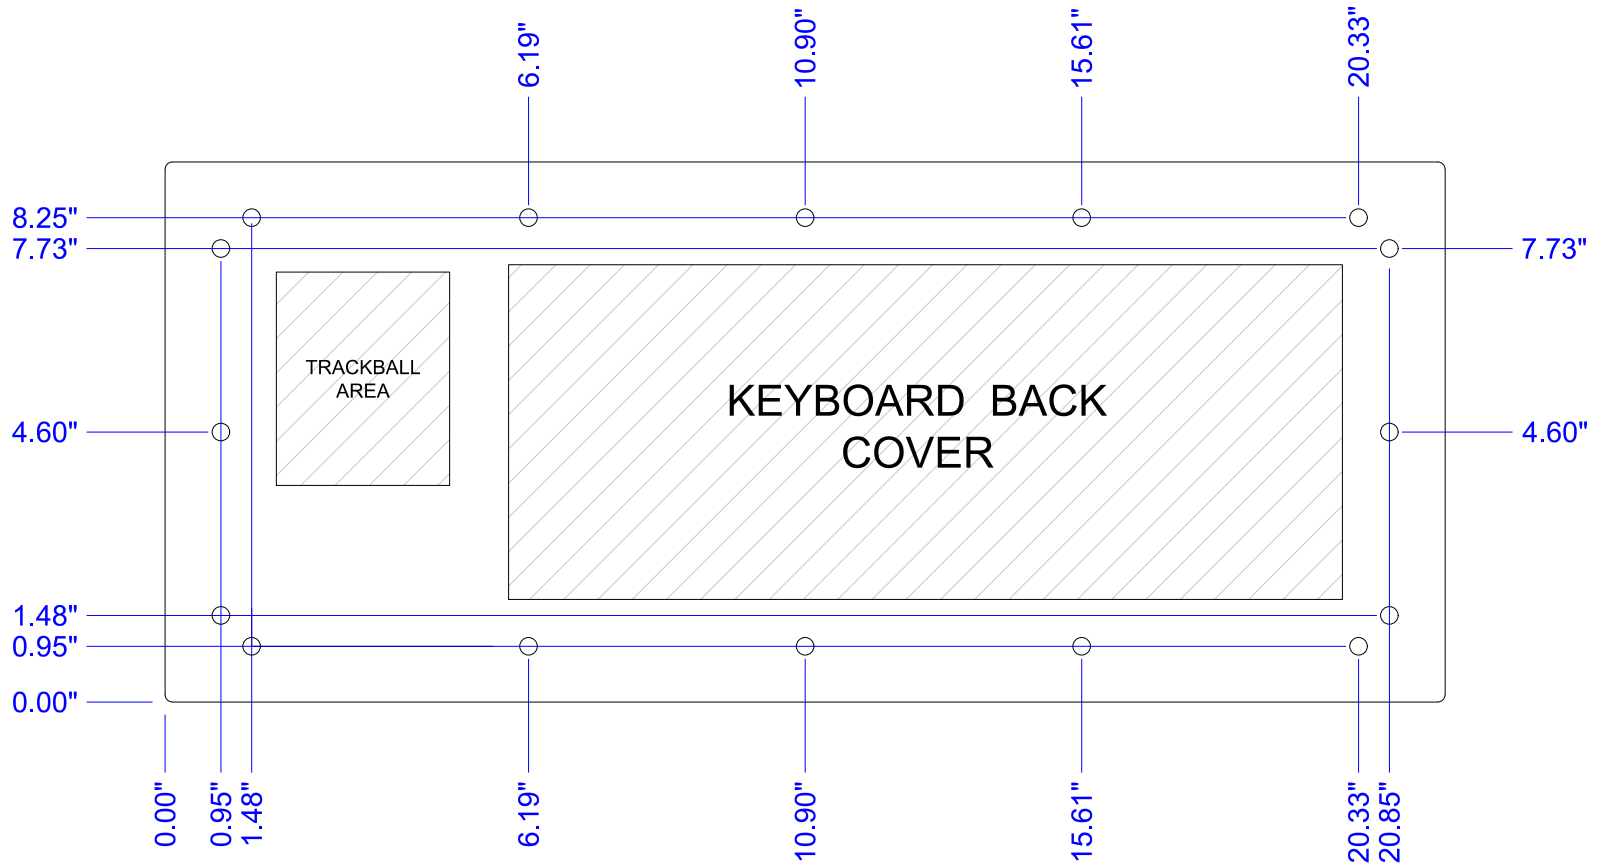

NOTE:  
8-32 TH'D STUD, 16 PLACES

PROPRIETARY AND CONFIDENTIAL



iKey, Ltd.  
2621 Ridgpoint Dr, Suite 235  
Austin, Texas 78754

©2009 iKey, Ltd.  
Voice: (512) 837-0283  
Fax: (512) 927-8530

Part Number: PM-2000-FSR  
Drawing Title: PM-2000-FSR-MKT

Drawing Number: MKT0020  
Revision: 1.00

Sheet: 2 OF 2  
Date: 01.02.09

JWB