
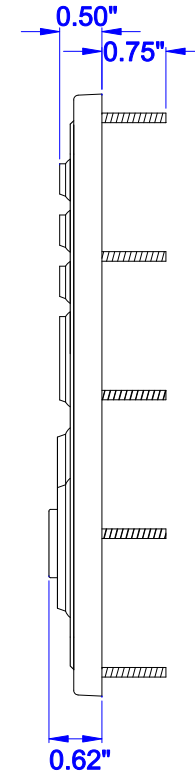


PMU-5K

DATE	CHANGES	INTL	REV
07.22.04	Original		1.00
07.26.07	Increased Overall Bezel Dimensions		2.00
05.14.09	Updated Drawing Format & Power Spec.	JB	3.00

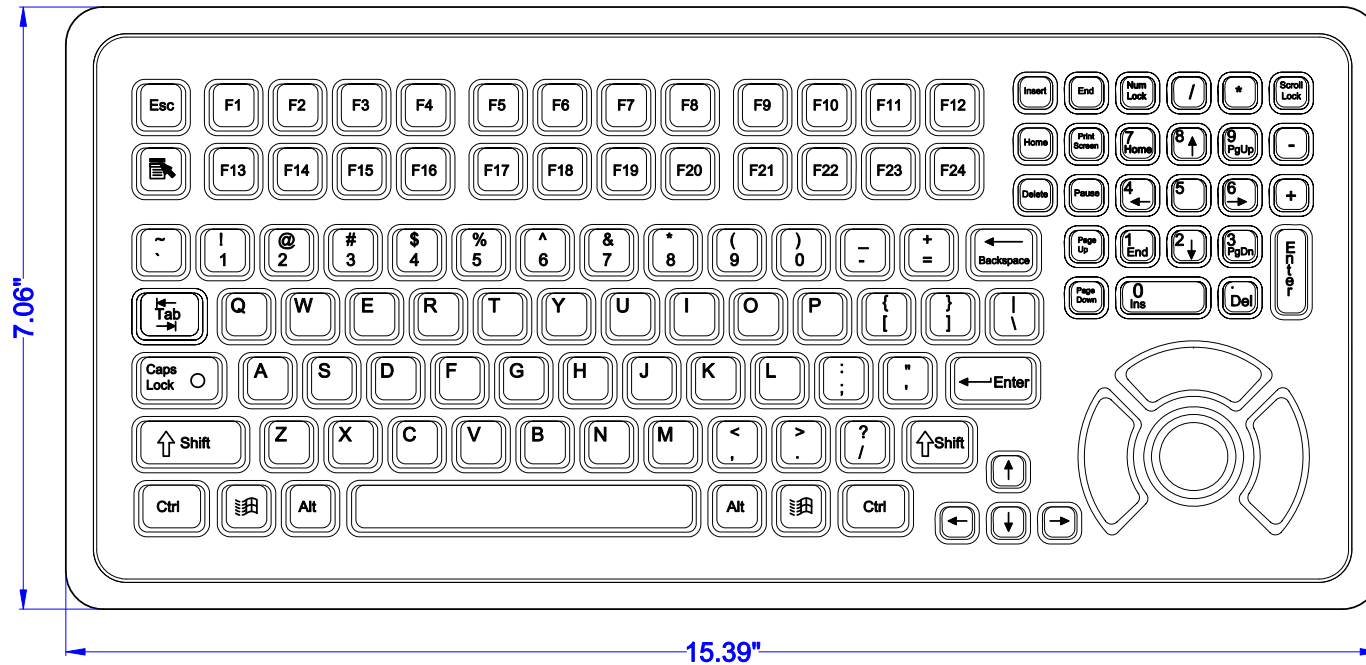

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
LIFE: Greater Than 10 Million Cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 6.35 oz. +/- 1.06oz (180g +/- 30g)
FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +70°C)
OPERATING: -4°F to +140°F (-20°C to +60°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
FREQUENCY RANGE: 20Hz-2KHz
DURATION OF TEST PER AXIS: 3 hours

POWER

PS2:
KEYBOARD: 50mA@5V (from Keyboard port)
POINTER: 35mA@5V (from Mouse port)
USB: 85mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2.25



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754


©2008 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8630

Part Number: PMU-5K
Drawing Title: PMU-5K-MKT

Drawing Number: MKT0020
Revision: 3.00

Sheet: 1 OF 2
Date: 05.14.09
JWB

PMU-5K MOUNTING

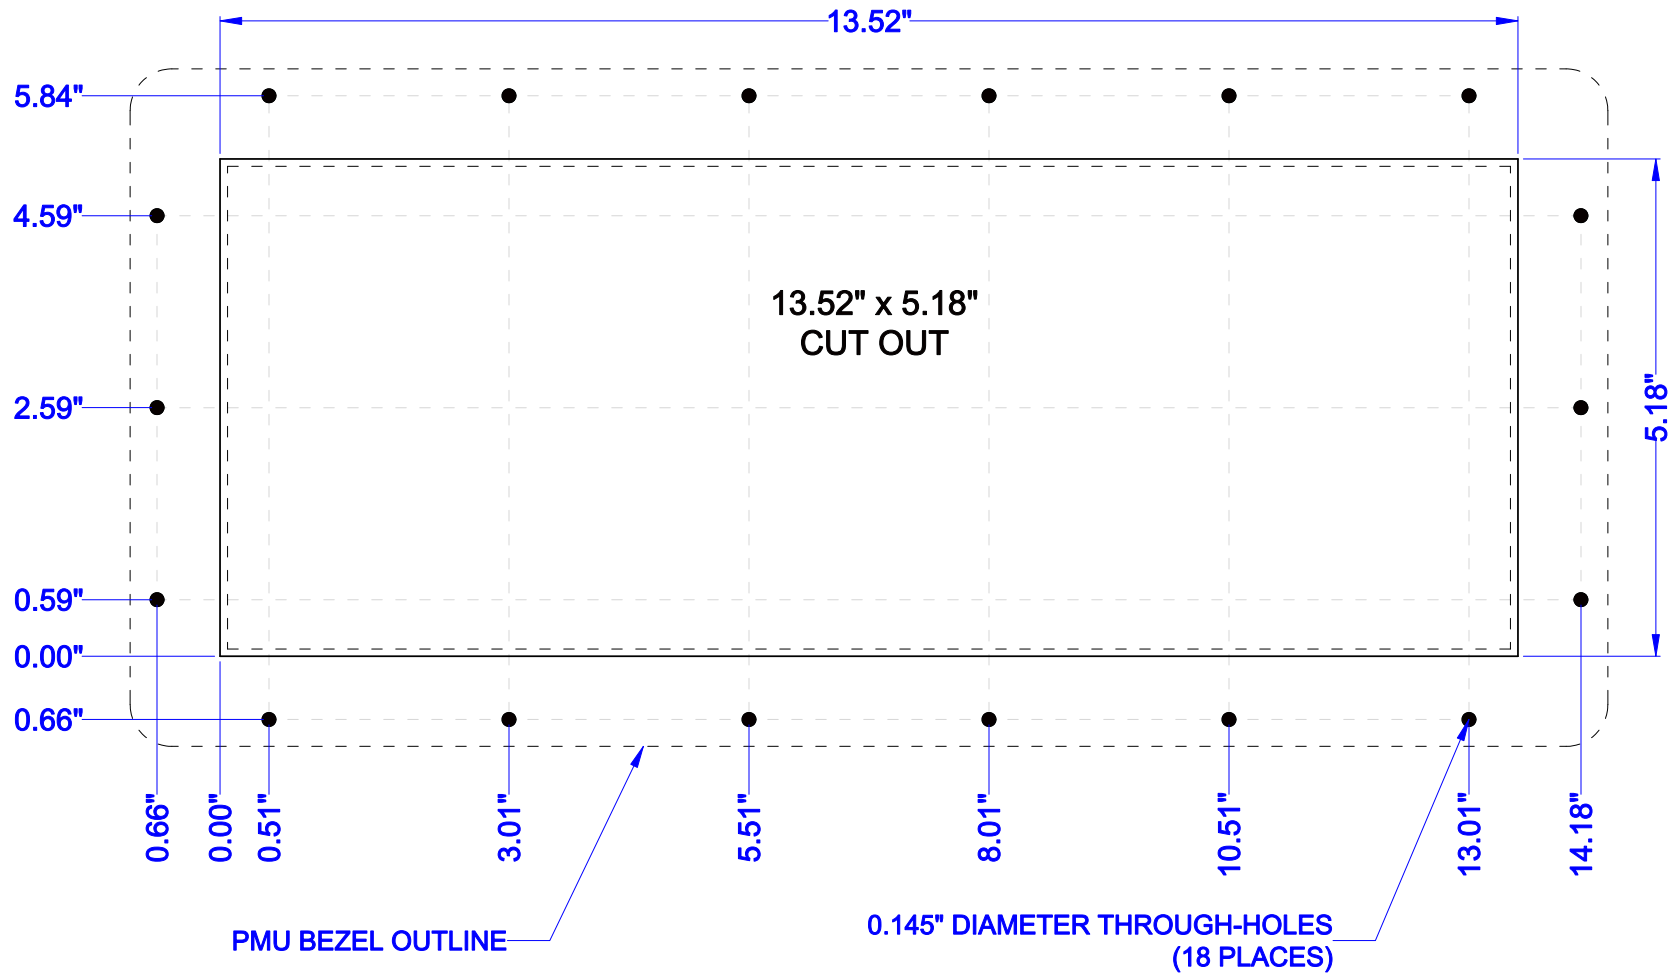

PMU BEZEL: ABS/Polycarbonate with 4-40 x 0.75" Metal Studs (18 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
2621 Ridgpoint Dr. Suite 235
Austin, Texas 78754

©2008 iKey, Ltd.
Voice: (512) 837-0283
Fax: (512) 927-8630

Part Number: PMU-5K
Drawing Title: PMU-5K-MKT

Drawing Number: MKT0020
Revision: 3.00

Sheet: 2 OF 2
Date: 05.14.09
JWB