


SLK-97-TP

DATE	CHANGES	INTL	REV
06.03.09	Original	JB	1.0
01.05.11	Updated Temp Spec	JMW	1.1
01.24.11	Changed lineweights	TWH	1.2
06.06.17	Added case dimensions	ALH	1.3
06.12.17	Added case dimensions	ALH	1.4

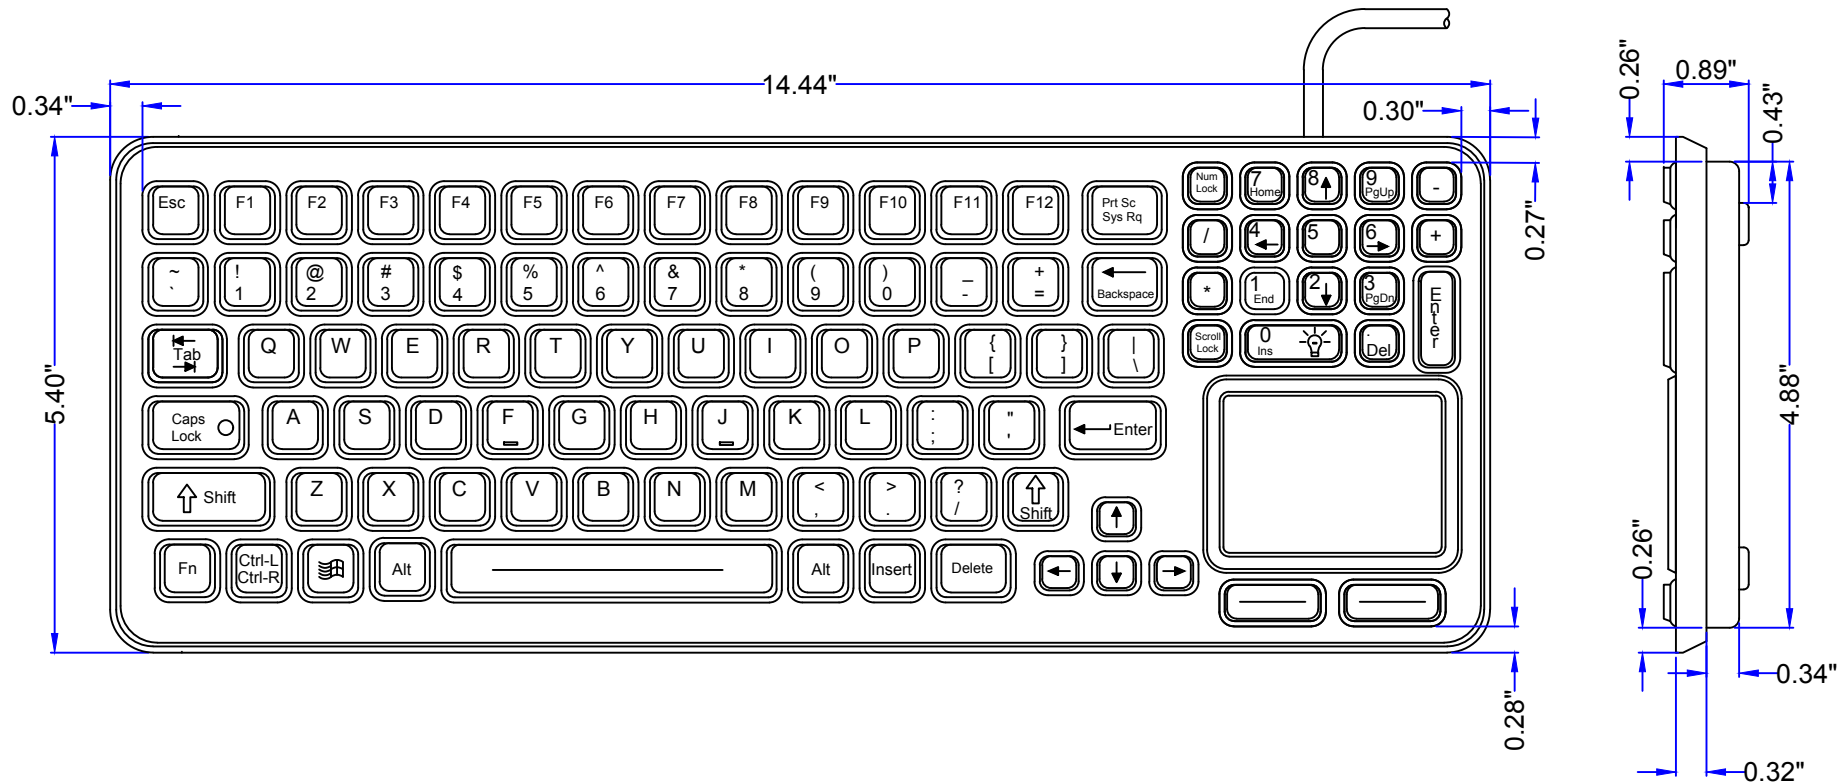

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g²/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2:
 KEYBOARD: 210mA@5V (from Keyboard port)
 TOUCH PAD: 10mA@5V (from Mouse port)
 USB: 220mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axes

WEIGHT

1.50 lbs +/- 0.10 lbs (0.68 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754


©2017 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLK-97-TP
 Drawing Title: SLK-97-TP-MKT

Drawing Number: MKT0197
 Revision: 1.4

Sheet: 1 OF 1
 Date: 06.12.17
 ALH

SLK-97-TP

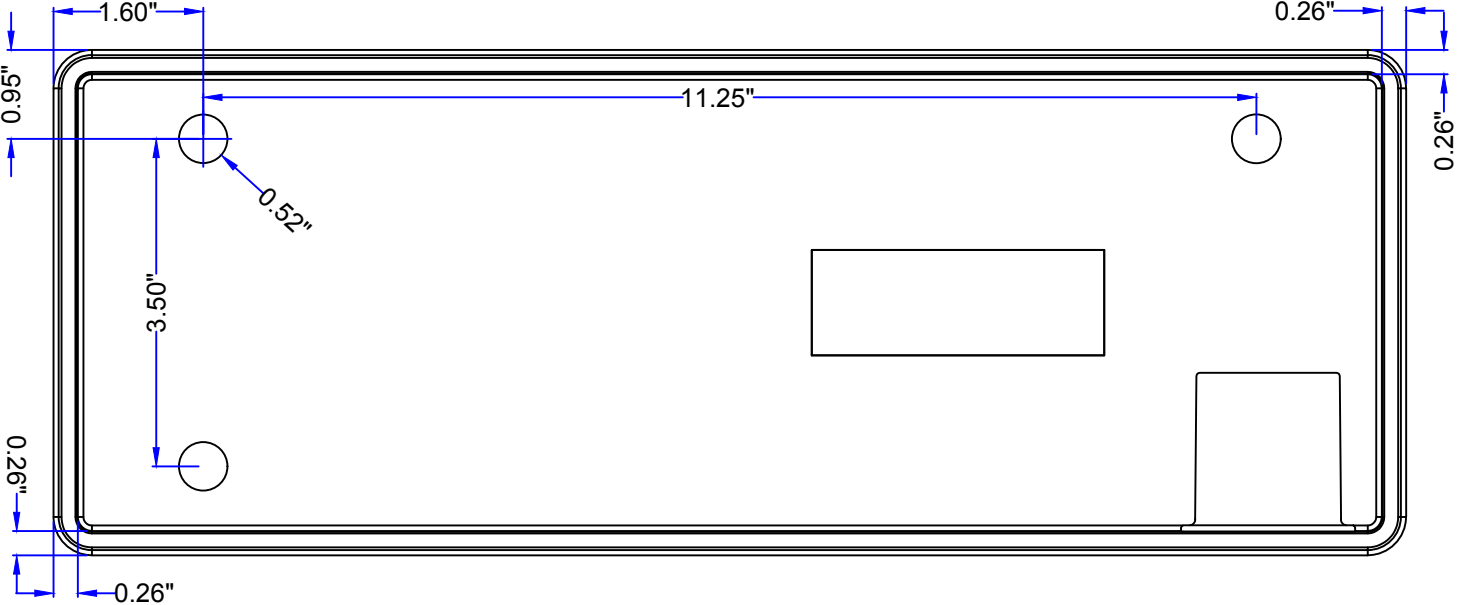

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2

iKey iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2017 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLK-97-TP
 Drawing Title: SLK-97-TP-MKT

Drawing Number: MKT0197
 Revision: 1.4

Sheet: 1 OF 1
 Date: 06.12.17

ALH