
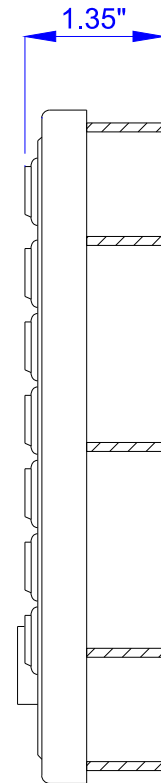


SLP-86-911-FSR-461

DATE	CHANGES	INTL	REV
08.13.10	Original	JMW	1.00

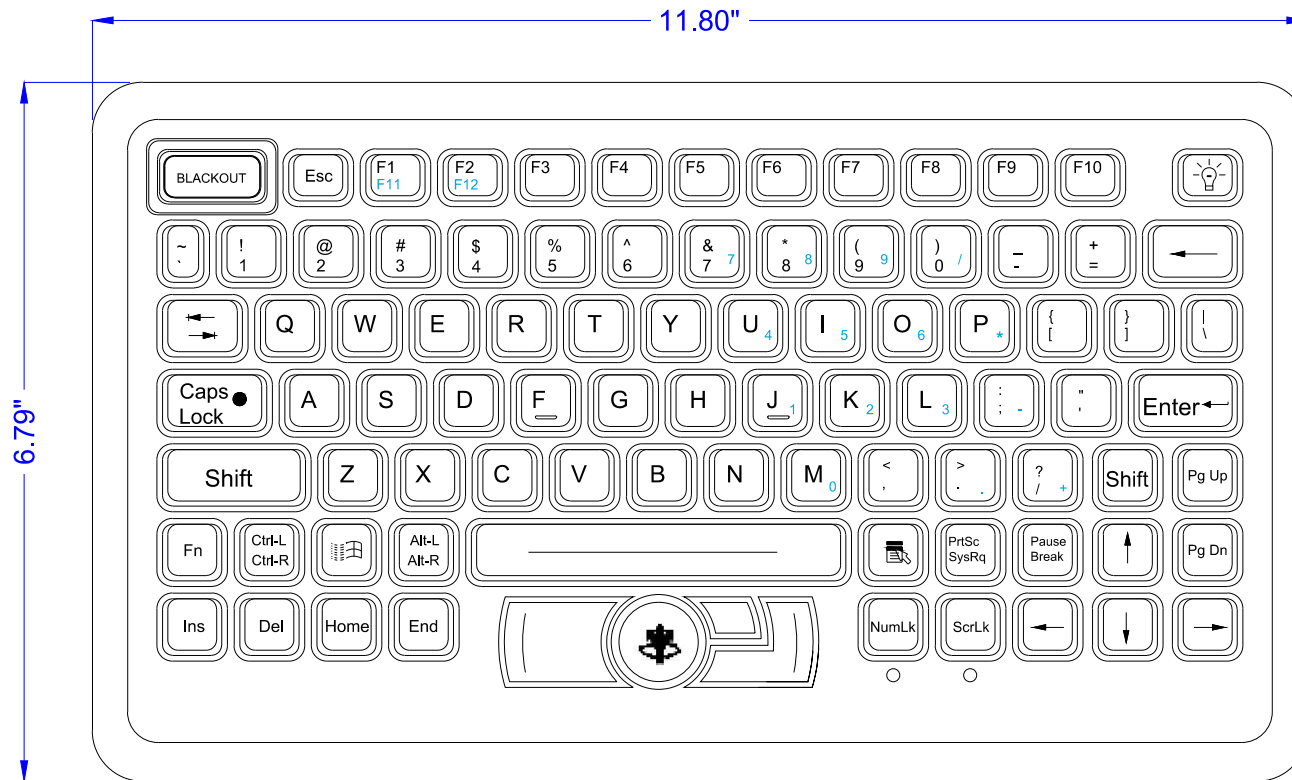

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

POWER

PS2: 250mA@5V (from PS2 port)

TEMPERATURE RANGE

STORAGE: -40°F to +158°F (-40°C to +90°C)
 OPERATING: -4°F to +140°F (-40°C to +70°C)

HUMIDITY

100% Humidity Resistant

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2Khz
 DURATION OF TEST PER AXIS: 3 hours

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

1.75 lbs +/- 0.10 lbs (0.79 kg +/- 0.05 kg)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2010 iKey, Ltd.
 Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLP-86-911-FSR-461

Drawing Title: SLP-86-911-FSR-461-MKT

Drawing Number: MKT0239


Revision: 1.00

Sheet: 1 OF 2

Date: 08.13.10

JMW

SLP-86-911-FSR-461 MOUNTING

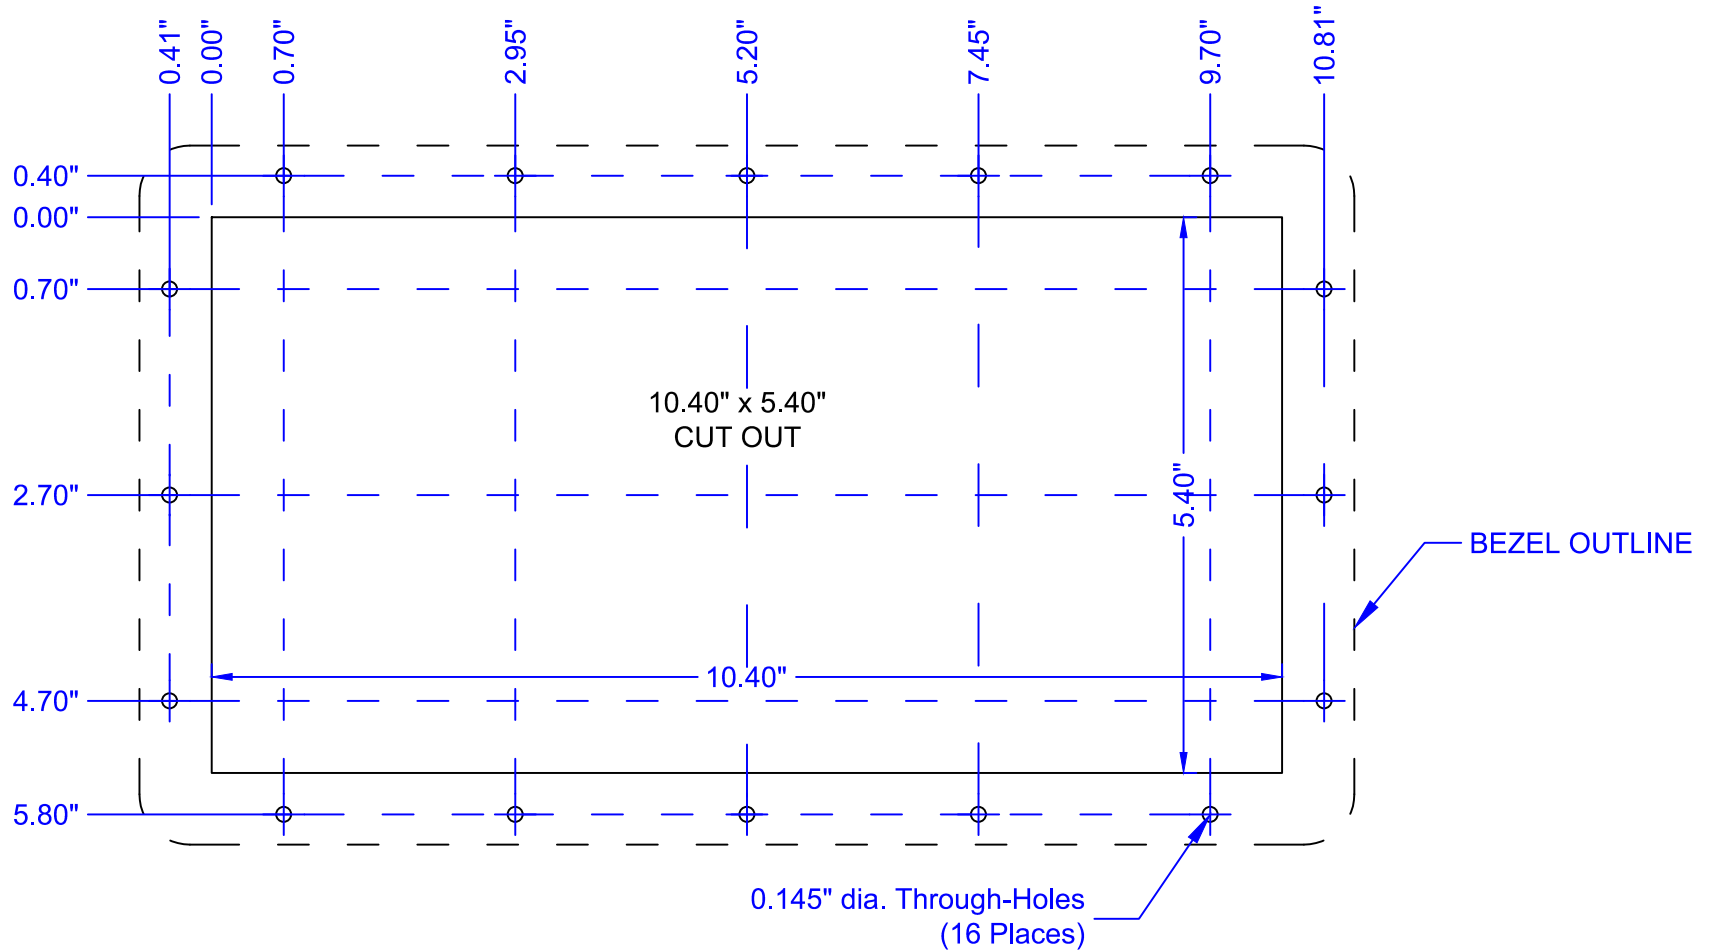

PMU BEZEL: ABS/Polycarbonate with #4-40 x 0.75" Metal Studs (16 Places)

PROPRIETARY AND CONFIDENTIAL

SCALE: 1:2