


SLK-97-TP-M-BLK

DATE	CHANGES	INTL	REV
04.24.24	Original	ADD	1.0

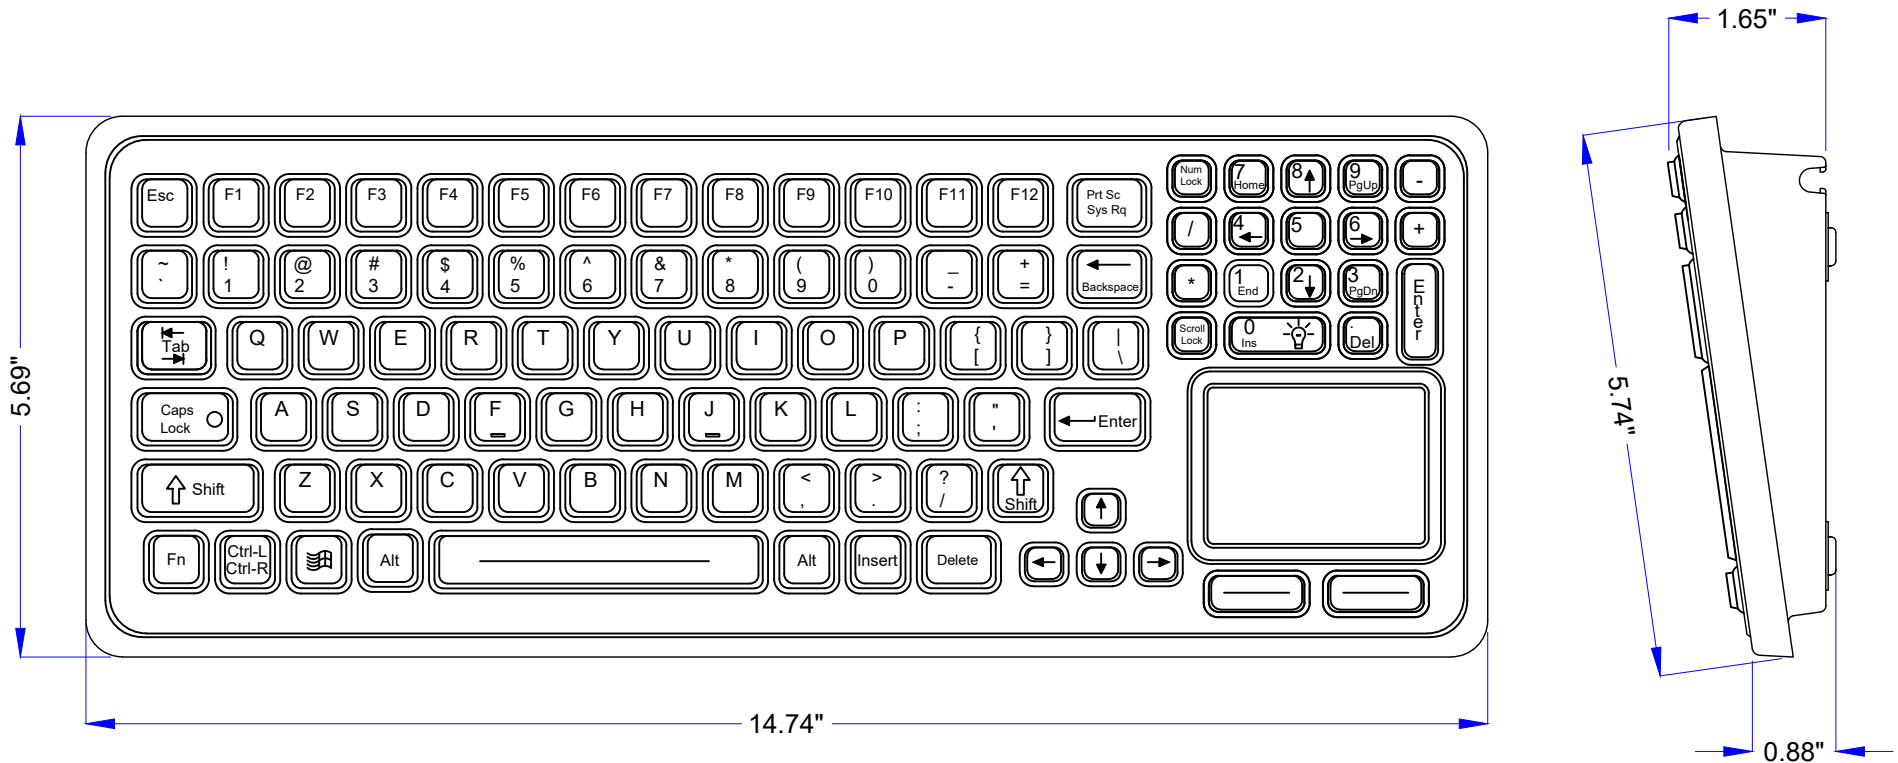

KEY SWITCH

MATERIAL: Industrial Silicone Rubber
 LIFE: Greater Than 10 Million Cycles
 TRAVEL: 0.055 in.
 ACTUATION FORCE: 7.05 oz. +/- 1.06oz (200g +/- 30g)
 FEEDBACK: Tactile with Mechanical Snap

TEMPERATURE RANGE

STORAGE: -40°F to +194°F (-40°C to +90°C)
 OPERATING: -40°F to +158°F (-40°C to +70°C)

VIBRATION

POWER SPECTRAL DENSITY: .04g/HZ
 FREQUENCY RANGE: 20Hz-2KHz
 DURATION OF TEST PER AXIS: 3 hours

POWER

PS2: KEYBOARD: 210mA@5V (from Keyboard port)
 TOUCH PAD: 10mA@5V (from Mouse port)
 USB: 220mA@5V (from CPU port)

HUMIDITY

100% Humidity Resistant

SHOCK

3 X 11 ms pulses of 50g on each of 3 axis

WEIGHT

2.00 lbs +/- 0.10 lbs (0.91 kg +/- 0.05 kg)

PROPRIETARY / CONFIDENTIAL

SCALE: 1:2



iKey, Ltd.
 2621 Ridgpoint Dr. Suite 235
 Austin, Texas 78754

©2024 iKey, Ltd.

Voice: (512) 837-0283
 Fax: (512) 927-8530

Part Number: SLK-97-TP-M-BLK

Drawing Title: SLK-97-TP-M-BLK-MKT

Drawing Number: MKT0550


Revision: 1.0

Sheet: 1 OF 2

Date: 04.25.24

ADD

SLK-97-TP-M BACK/MOUNTING

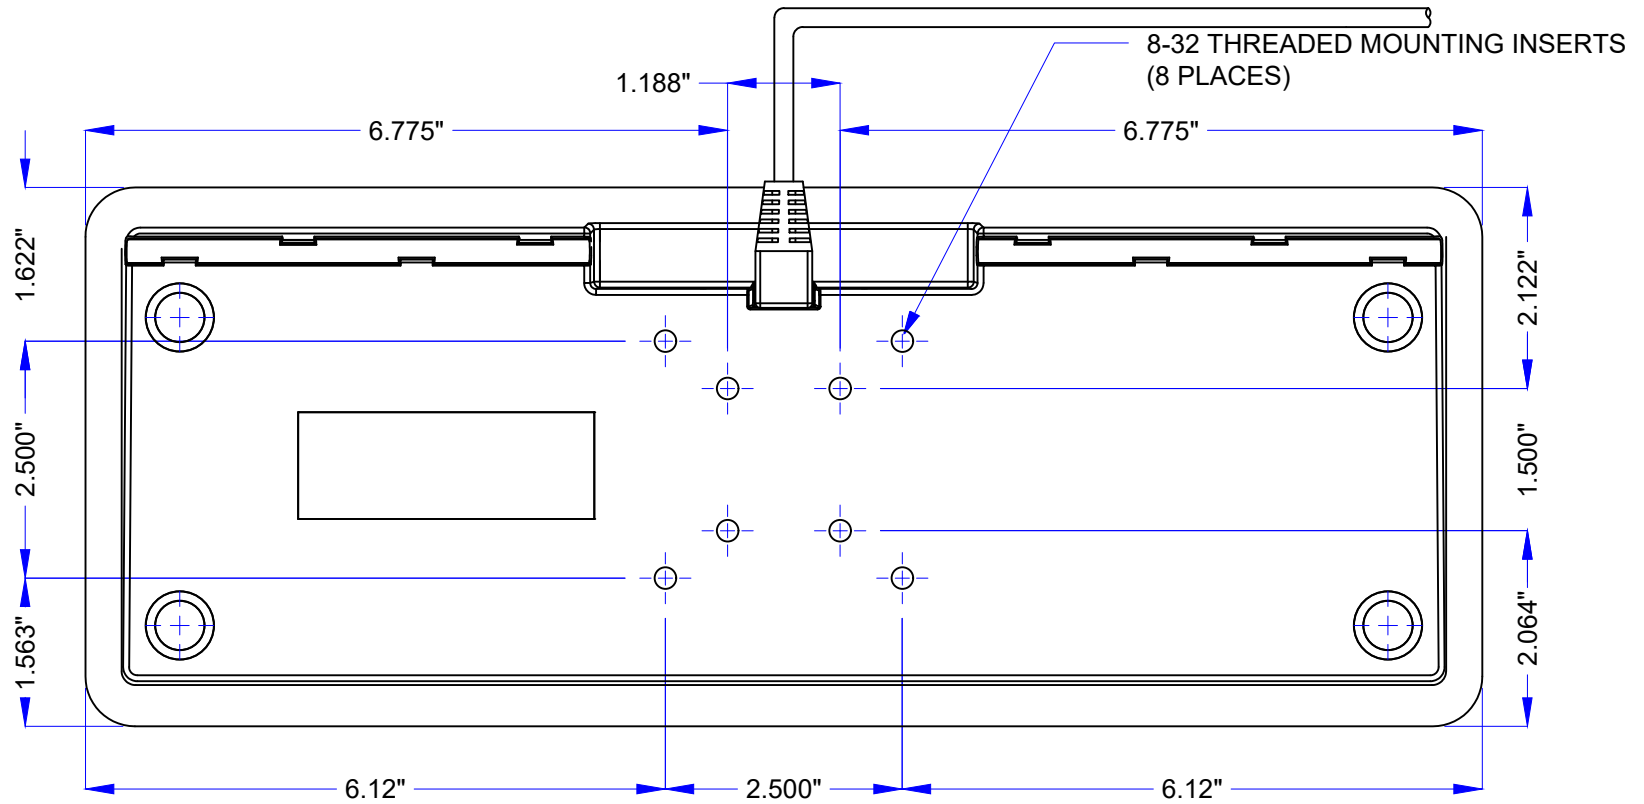

ENCLOSURE CASE: ABS/Polycarbonate

SCALE: 1:2



iKey, Ltd.
 2621 Ridgepoint Dr. Suite 235
 Austin, Texas 78754
 Voice: (512) 837-0283
 Fax: (512) 927-8530

©2024 iKey, Ltd.

Part Number: SLK-97-TP-M-BLK

Drawing Title: SLK-97-TP-M-BLK-MKT

Drawing Number: MKT0550

Revision: 1.0

Sheet: 2 OF 2

Date: 04.25.24

ADD